

# DIN 2635

**Bridas con cuello para soldar**  
**Presion nominal 40**

**Ver imagen DIN 5**  
**See DIN image 5**

**Welding neck flanges**  
**Rated pressure 40**

**Vorschweißflansche**  
**Nenndruck 40**

Medidas en milímetros

Dimensions in mm


Maße in mm

Tubo / Pipe / Rohr - Anschlußmaße			Brida / Flange / Flansch				Cuello / Neck / Ansatz				Resalto / Raised face /		Tornillos / Screws / Schrauben			Peso de una brida / Weight of a flange / Gewicht eines Flansches (7,85 Kg/dm <sup>3</sup> )
Diámetro Nominal Rated Diameter Nennweite	d1		D	b	k	h1	d3	s	r	h2	d4	f	Numero / Number / Anzahl	Rosca / Thread / Gewinde	d2	Kg
	ISO Serie 1 Reihe 1	DIN Serie 2 Reihe 2														
10	—	14	90	16	60	35	25	1,8	4	6	40	2	4	M 12	14	0,661
	17,2	-														
15	-	20	95	16	65	38	30	2	4	6	45	2	4	M 12	14	0,746
	21,3	-														
20	-	25	105	18	75	40	38	2,3	4	6	58	2	4	M 12	14	1,06
	26,9	-														
25	-	30	115	18	85	40	42	2,6	4	6	68	2	4	M 12	14	1,29
	33,7	-														
32	-	38	140	18	100	42	52	2,6	6	6	78	2	4	M 16	18	1,88
	42,4	-														
40	-	44,5	150	18	110	45	60	2,6	6	7	88	3	4	M 16	18	2,33
	48,3	-														
50	-	57	165	20	125	48	72	2,9	6	8	102	3	4	M 16	18	2,82
	60,3	-														
65	76,1	-	185	22	145	52	90	2,9	6	10	122	3	8	M 16	18	3,74
80	88,9	-	200	24	160	58	105	3,2	8	12	138	3	8	M 16	18	4,75
100	-	108	235	24	190	65	128	3,6	8	12	162	3	8	M20	22	6,52
	114,3	-														
125	-	133	270	26	220	68	155	4	8	12	188	3	8	M24	26	9,07
	139,7	-														
150	-	159	300	28	250	75	182	4,5	10	12	218	3	8	M24	26	11,8
	168,3	-														
( 175 )	193,7	-	350	32	295	82	218	5,6	10	15	260	3	12	M27	30	18,2
200	219,1	-	375	34	320	88	244	6,3	10	16	285	3	12	M27	30	21,5
250	-	267	450	38	385	105	298	7,1	12	18	345	3	12	M30	33	34,9
	273	-														
300	323,9	-	515	42	450	115	362	8	12	18	410	4	16	M 30	33	49,7
350	355,6	-	580	46	510	125	408	8,8	12	20	465	4	16	M33	36	68,1
	-	368														
400	406,4	-	660	50	585	135	462	11	12	20	535	4	16	M36	39	96,5
	-	419														
( 450 )	457	-	685	50	610	135	500	12,5	12	20	560	4	20	M36	39	99,7
500	508	-	755	52	670	140	562	14,2	12	20	615	4	20	M39	42	117

**Bridas con cuello para soldar**  
**Presion nominal 1, 2.5, 6, 10, 16, 25, 40, 64 y 100**

**Welding neck flanges**  
**Rated pressure 1, 2.5, 6, 10, 16, 25, 40, 64 and 100**

**Vorschweißflansche**  
**Nennndruck 1, 2.5, 6, 10, 16, 25, 40, 64 und 100**

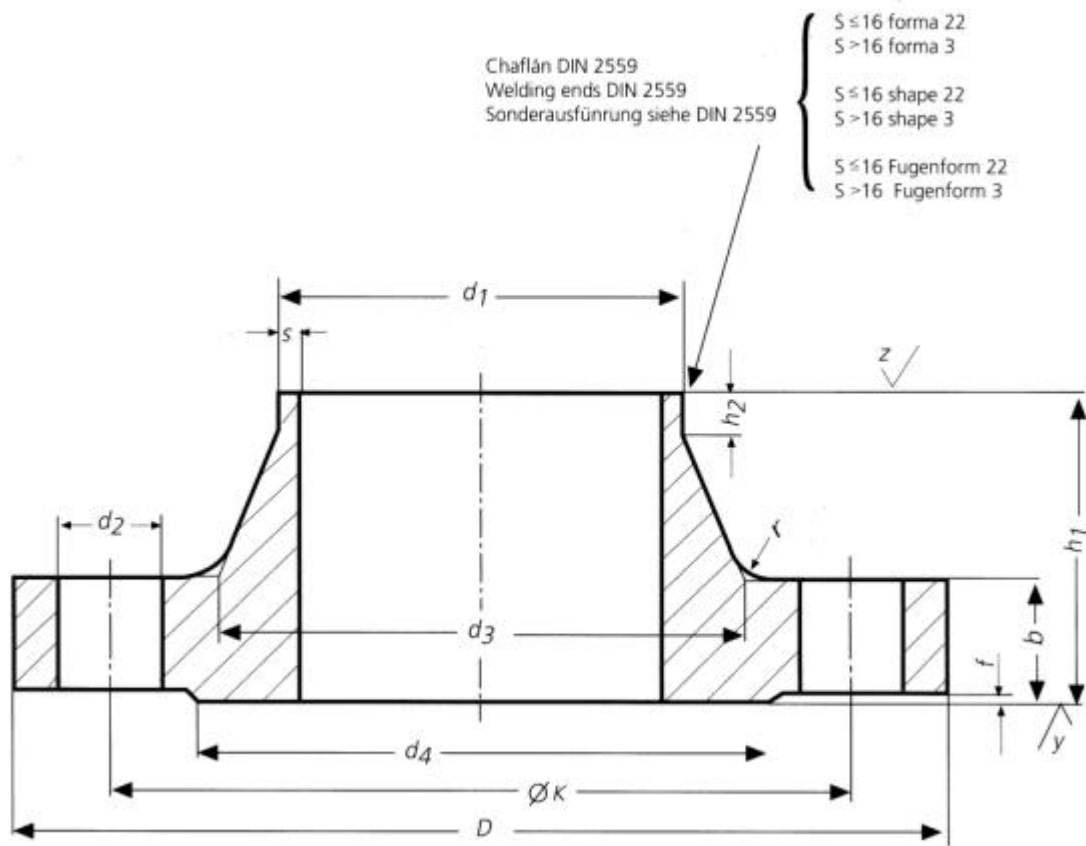

$\sqrt{z} = \sqrt{R_z = 160}$   
 torneado  
 turning  
 gedreht

$\sqrt{y} = \sqrt{R_y = 160}$

**Imagen 5**