


F. Ancillary systems

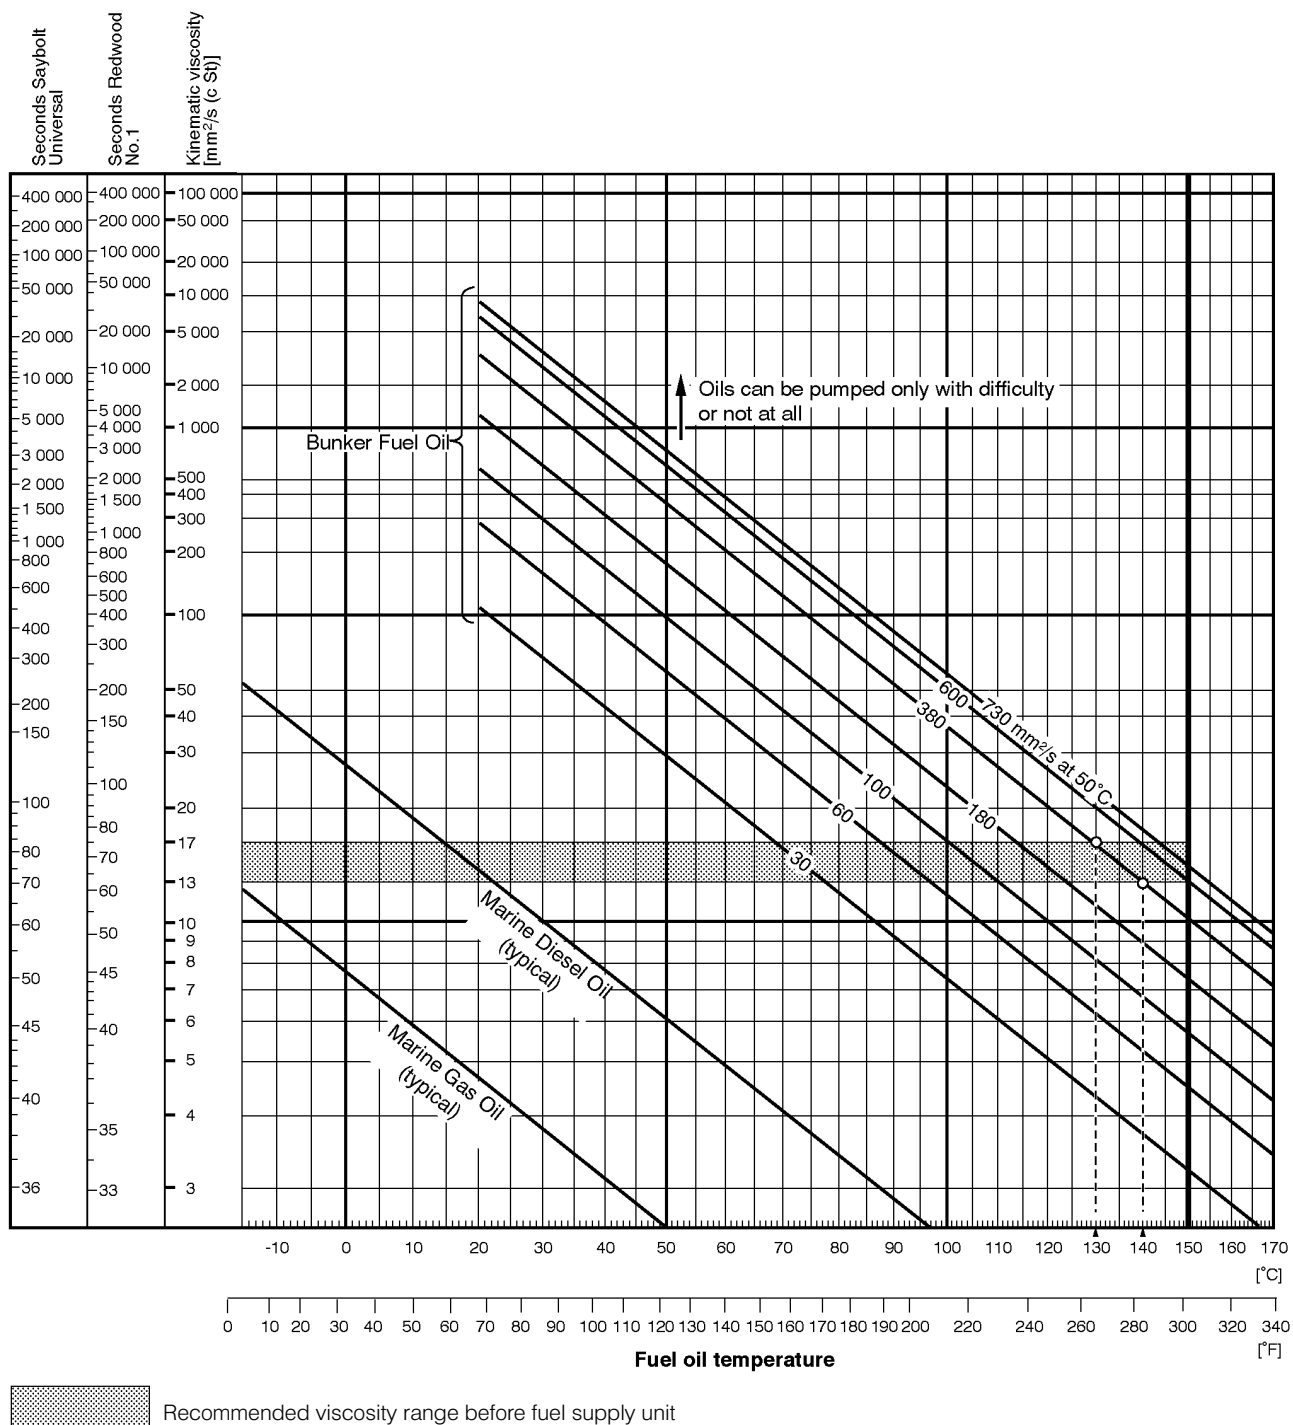

Example:

To obtain the recommended viscosity before the fuel supply unit, fuel oil of 380 mm²/s (cSt) at 50 °C must be heated up to 130–140 °C.

F10.4779

Fig. F24 Typical viscosity / temperature diagram