


Dimensions and properties

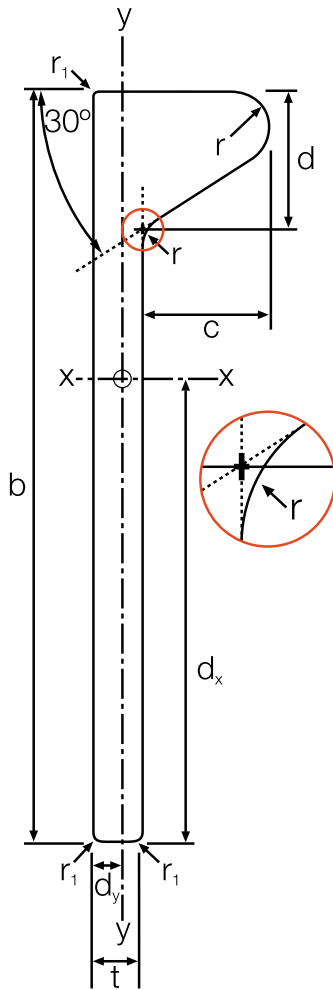

Width b [mm]	Thickness t [mm]	Mass per Unit Length G [kg/m]	Bulb Height c [mm]	Bulb Width d [mm]	Bulb Radius r [mm]	Area of cross- section F [cm ²]	Surface Area U [m ² /m]
120	6	7.31	17	17.7	5	9.31	0.276
	7	8.25	17	17.7	5	10.5	0.278
	8	9.19	17	17.7	5	11.7	0.280
140	6.5	9.21	19	19.7	5.5	11.7	0.319
	7	9.74	19	19.7	5.5	12.4	0.320
	8	10.8	19	19.7	5.5	13.8	0.322
	10	13.0	19	19.7	5.5	16.6	0.326
160	7	11.4	22	22.2	6	14.6	0.365
	8	12.7	22	22.2	6	16.2	0.367
	9	14.0	22	22.2	6	17.8	0.369
	11.5	17.3	22	22.2	6	21.8	0.374
180	8	14.8	25	25.5	7	18.9	0.411
	9	16.2	25	25.5	7	20.7	0.413
	10	17.6	25	25.5	7	22.5	0.415
	11.5	19.7	25	25.5	7	25.2	0.418
200	8.5	17.8	28	28.8	8	22.6	0.456
	9	18.5	28	28.8	8	23.6	0.457
	10	20.1	28	28.8	8	25.6	0.459
	11	21.7	28	28.8	8	27.6	0.461
	12	23.2	28	28.8	8	29.6	0.463
220	9	21.0	31	32.1	9	26.8	0.501
	10	22.8	31	32.1	9	29.0	0.503
	11	24.5	31	32.1	9	31.2	0.505
	12	26.2	31	32.1	9	33.4	0.507
240	9.5	24.4	34	35.4	10	31.2	0.546
	10	25.4	34	35.4	10	32.4	0.547
	11	27.4	34	35.4	10	34.9	0.549
	12	29.3	34	35.4	10	37.3	0.551
260	10	28.3	37	38.7	11	36.1	0.593
	11	30.3	37	38.7	11	38.7	0.593
	12	32.4	37	38.7	11	41.3	0.595
280	10.5	32.4	40	42.0	12	41.2	0.636
	11	33.5	40	42.0	12	42.6	0.637
	12	35.7	40	42.0	12	45.5	0.639
	13	37.9	40	42.0	12	48.4	0.641
300	11	36.7	43	45.3	13	46.7	0.681
	12	39.0	43	45.3	13	49.7	0.683
	13	41.5	43	45.3	13	52.8	0.685
320	11.5	41.2	46	48.6	14	52.6	0.727
	12	42.5	46	48.6	14	54.2	0.728
	13	45.0	46	48.6	14	57.4	0.730
	14	47.5	46	48.6	14	60.6	0.732
340	12	46.1	49	52.0	15	58.8	0.772
	13	48.8	49	52.0	15	62.2	0.774
	14	51.5	49	52.0	15	65.5	0.776
	15	54.2	49	52.0	15	69.0	0.778
370	12.5	53.1	53.5	56.9	16.5	67.8	0.839
	13	54.6	53.5	56.9	16.5	69.6	0.840
	14	57.5	53.5	56.9	16.5	73.3	0.842
	15	60.5	53.5	56.9	16.5	77.0	0.844
	16	63.5	53.5	56.9	16.5	80.7	0.846
400	13	60.8	58	61.9	18	77.4	0.907
	14	63.9	58	61.9	18	81.4	0.908
	15	67.0	58	61.9	18	85.4	0.910
	16	70.2	58	61.9	18	89.4	0.912
430	14	70.6	62.5	66.8	19.5	89.7	0.975
	15	73.9	62.5	66.8	19.5	94.1	0.976
	17	80.6	62.5	66.8	19.5	103.0	0.980
	20	90.8	62.5	66.8	19.5	115.0	0.986

Additional sizes may be available by agreement: 80 & 100 DIN range
180, 200, 230 and 250 JIS range

* Values for H are taken about the line of attachment.