

Specification for Drilling and Well Servicing Structures

API SPECIFICATION 4F
THIRD EDITION, JANUARY 2008

EFFECTIVE DATE: JULY 1, 2008



Specification for Drilling and Well Servicing Structures

Upstream Segment

API SPECIFICATION 4F
THIRD EDITION, JANUARY 2008

EFFECTIVE DATE: JULY 1, 2008



Special Notes

API publications necessarily address problems of a general nature. With respect to particular circumstances, local, state, and federal laws and regulations should be reviewed.

Neither API nor any of API's employees, subcontractors, consultants, committees, or other assignees make any warranty or representation, either express or implied, with respect to the accuracy, completeness, or usefulness of the information contained herein, or assume any liability or responsibility for any use, or the results of such use, of any information or process disclosed in this publication. Neither API nor any of API's employees, subcontractors, consultants, or other assignees represent that use of this publication would not infringe upon privately owned rights.

API publications may be used by anyone desiring to do so. Every effort has been made by the Institute to assure the accuracy and reliability of the data contained in them; however, the Institute makes no representation, warranty, or guarantee in connection with this publication and hereby expressly disclaims any liability or responsibility for loss or damage resulting from its use or for the violation of any authorities having jurisdiction with which this publication may conflict.

API publications are published to facilitate the broad availability of proven, sound engineering and operating practices. These publications are not intended to obviate the need for applying sound engineering judgment regarding when and where these publications should be utilized. The formulation and publication of API publications is not intended in any way to inhibit anyone from using any other practices.

Any manufacturer marking equipment or materials in conformance with the marking requirements of an API standard is solely responsible for complying with all the applicable requirements of that standard. API does not represent, warrant, or guarantee that such products do in fact conform to the applicable API standard.

All rights reserved. No part of this work may be reproduced, stored in a retrieval system, or transmitted by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission from the publisher. Contact the Publisher, API Publishing Services, 1220 L Street, N.W., Washington, D.C. 20005.

Copyright © 2008 American Petroleum Institute

Foreword

Nothing contained in any API publication is to be construed as granting any right, by implication or otherwise, for the manufacture, sale, or use of any method, apparatus, or product covered by letters patent. Neither should anything contained in the publication be construed as insuring anyone against liability for infringement of letters patent.

This document was produced under API standardization procedures that ensure appropriate notification and participation in the developmental process and is designated as an API standard. Questions concerning the interpretation of the content of this publication or comments and questions concerning the procedures under which this publication was developed should be directed in writing to the Director of Standards, American Petroleum Institute, 1220 L Street, N.W., Washington, D.C. 20005. Requests for permission to reproduce or translate all or any part of the material published herein should also be addressed to the director.

Generally, API standards are reviewed and revised, reaffirmed, or withdrawn at least every five years. A one-time extension of up to two years may be added to this review cycle. Status of the publication can be ascertained from the API Standards Department, telephone (202) 682-8000. A catalog of API publications and materials is published annually and updated quarterly by API, 1220 L Street, N.W., Washington, D.C. 20005.

Suggested revisions are invited and should be submitted to the Standards Department, API, 1220 L Street, NW, Washington, D.C. 20005, standards@api.org.

Copyright American Petroleum Institute

Contents

	Page
1 Scope	1
2 Normative References	1
3 Terms and Definitions	2
4 Product Specification Levels	5
5 Marking and Information	5
5.1 Nameplate	5
5.2 Derrick and Mast Nameplate Information	5
5.3 Substructure Nameplate Information	6
5.4 Crown Block Assembly Nameplate Information	7
6 Structural Safety Level	7
7 Design Loading	8
8 Design Specification	9
8.1 Allowable Stresses	9
8.2 Operating Loads	10
8.3 Wind Loads	10
8.4 Dynamic Loads	20
8.5 Earthquake Loads	20
8.6 Erection Loads	20
8.7 Transportation Loads	21
8.8 Overturning and Sliding	21
8.9 Design Verification	22
9 Materials	22
9.1 General	22
9.2 Written Specifications	22
9.3 Mechanical Properties	23
9.4 Material Qualification	23
9.5 Material Manufacture	23
9.6 Bolts	23
9.7 Wire Rope	23
10 Welding Requirements	23
10.1 General	23
10.2 Welding Qualifications	23
10.3 Written Documentation	24
10.4 Control of Consumables	24
10.5 Weld Properties	24
10.6 Post-weld Heat Treatment	24
10.7 Quality Control Requirements	24
10.8 Specific Requirements—Repair Welds	24
11 Quality Control	25
11.1 Quality Control Personnel Qualifications	25
11.2 Measuring and Test Equipment	25
11.3 Non-destructive Examination	25
11.4 Dimensional Verification	27
11.5 Workmanship and Finishing	27
11.6 Purchaser's Inspection and Rejection	27
11.7 Testing	28
11.8 Traceability	28

12	Documentation	29
12.1	General	29
12.2	Documentation to be Kept by the Manufacturer	29
12.3	Documentation to be Delivered with Equipment	30
	Annex A (normative) Supplementary Requirements	31
	Annex B (informative) Commentary	33
	Annex C (informative) API Monogram	43
	Bibliography	45

Tables

7.1	Design Loadings	8
8.1	Onshore Structural Safety Level Multiplier	16
8.2	Offshore Structural Safety Level Multiplier	16
8.3	Minimum Design Wind Speed, m/s (knots)	17
8.4	Elevation Factor, β Location: All	17
8.5	Gust Effect Factor	18
8.6	Shape Coefficients	19
A.1	Adjustment Factors for Sub-size Impact Specimens	31

Specification for Drilling and Well Servicing Structures

1 Scope

This specification states requirements and gives recommendations for suitable steel structures for drilling and well-servicing operations in the petroleum industry, provides a uniform method of rating the structures, and provides two PSLs.

This specification is applicable to all new designs of all steel derricks, masts, guyed masts, substructures, and crown blocks.

Annex A provides a number of standard Supplementary Requirements (SRs) which apply only if specified by the purchaser.

2 Normative References

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

API RP 2A-WSD, *Recommended Practice for Planning, Designing and Constructing Fixed Offshore Platforms—Working Stress Design*

API Bulletin 2INT-MET, *Interim Guidance on Hurricane Conditions in the Gulf of Mexico*

API RP 4G, *Recommended Practice for Use and Procedures for Inspection, Maintenance, and Repair of Drilling and Well Servicing Structures*

API Spec 8A, *Specification for Drilling and Production Hoisting Equipment*

API RP 9B, *Recommended Practice on Application, Care and Use of Wire Rope for Oilfield Service*

AISC 335-89¹, *Specification for Structural Steel Buildings—Allowable Stress Design and Plastic Design*

ASCE/SEI 7-05², *Minimum Design Loads for Buildings and Other Structures*

ASTM A370³, *Standard Test Methods and Definitions for Mechanical Testing of Steel Products*

ASTM A578/A 578M, *Standard Specification for Straight-Beam Ultrasonic Examination of Rolled Steel Plates for Special Applications*

AWS D1.1/D1.1M:2002⁴, *Structural Welding Code — Steel*

ISO 9712⁵, *Non-destructive testing — Qualification and certification of personnel*

ISO 10425, *Steel wire ropes for the petroleum and natural gas industries — Minimum requirements and terms of acceptance*

¹ American Institute of Steel Construction, 1 East Wacker Drive, Suite 3100, Chicago, Illinois 60601, www.aisc.org.

² American Society of Civil Engineers, 1801 Alexander Bell Drive Reston, Virginia 20191, www.asce.org.

³ ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, Pennsylvania 19428-2959, www.astm.org.

⁴ American Welding Society, Incorporated, 550 Northwest LeJeune Road, Box 351040, Miami, Florida 33135, www.aws.org.

⁵ International Organization for Standardization (ISO), 1, rue de Varembe, Case postale 56, CH-1211 Geneva 20, Switzerland. www.iso.org.

ISO 13535, *Petroleum and natural gas industries — Drilling and production equipment — Hoisting equipment*

ISO 19901-1 Part 1, *Metocean design and operating considerations*

3 Terms and Definitions

For the purposes of this document, the following terms and definitions apply.

3.1

angle of roll

angle of pitch

Angle of movement to one side from vertical.

3.2

appurtenances

All components attached to, but not part of the *bare drilling structure*.

3.3

bare drilling structure

The structural members of the drilling structure including crown, water table, gin pole as applicable.

3.4

critical component

Component which is necessary to maintain stability of a structure and which resides within the primary load paths of the structure when the structure is loaded under the design loadings of Section 7.

3.5

critical weld

Weld which joins critical components.

3.6

crown block assembly

Stationary sheave or block assembly installed at the top of a derrick or mast.

3.7

date of manufacture

Date chosen by the manufacturer occurring between the initiation of manufacture and the delivery to the purchaser.

3.8

derrick

Structural tower, of square or rectangular cross-section, having members that are latticed or trussed on all four sides.

NOTE It may or may not be guyed.

3.9

design load

Force or combination of forces which a structure is designed to withstand without exceeding the allowable stress in any member.

3.10**design reference wind velocity (V_{ref})**

The wind velocity of a 3-second gust at a 10 m (33 ft) reference elevation, in knots, for the appropriate return period at the intended drilling location.

3.11**dynamic loading**

Loading imposed upon a structure as a result of motion.

3.12**erection load**

Load produced in the mast and its supporting structure during its raising and lowering, or in the substructure during its raising and lowering.

3.13**guide track and dollies**

Equipment used to hold the travelling equipment in correct position relative to the derrick during various operations.

NOTE A retractable dolly is used move the travelling equipment horizontally between the drilling position and the retracted position.

3.14**guy line**

Wire rope with one end attached to the mast assembly and the other end attached to a suitable anchor to provide structural and/or lateral support for a mast under design loading conditions.

3.15**guying pattern**

Plan view showing the manufacturer's recommended locations for guy lines and their distance out to the anchors with respect to the centreline of the well.

3.16**height of derrick and mast without guy lines**

Minimum vertical distance from the top of the working floor to the bottom of the crown block support beams.

3.17**height of mast with guy line**

Minimum vertical distance from the ground to the bottom of the crown block support beams.

3.18**impact loading**

Loading resulting from near-instantaneous changes of forces.

3.19**mast**

Structural latticed tower of rectangular cross-section with an open face.

3.20**mast set-up distance**

Distance from the centreline of the well to a designated point on the mast structure defined by a manufacturer to assist in the set-up of the rig.

3.21**maximum rated design wind velocity (V_{des})**

The wind velocity after adjustment for SSL by the onshore or offshore factor of a 3-second gust at a 10 m (33 ft) reference elevation, in knots, used to calculate the force that the drilling structure is designed to resist.

3.22**maximum rated static hook load**

Load composed of the weight of the travelling equipment and a static load applied to the travelling equipment.

NOTE It is the largest load that can be applied to the structure within the guidelines imposed by this standard with a specified number of lines strung to the travelling block and in the absence of pipe setback, sucker rod or wind loading. A designated location of the deadline anchor and drawworks is assumed.

3.23**nominal wire rope assembly strength**

Nominal strength of the wire rope, multiplied by the efficiency of the end attachment in accordance with API RP 9B.

3.24**period (τ)**

(of roll, pitch or heave) Time required for a complete cycle.

3.25**pipe lean**

Angle between the vertical and a typical stand of pipe in the setback.

3.26**Product Specification Level (PSL)**

Level of material and process controls placed upon the primary load-carrying components of the covered equipment.

3.27**racking platform**

Platform located at a distance above the working floor for laterally supporting the upper end of racked pipe.

3.28**rated static rotary load**

Maximum weight which can be supported by the rotary-table support beams.

3.29**rated setback load**

Maximum weight of tubular goods which can be supported by the substructure in the setback area.

3.30**rod board****rod hanger**

Platform located at a distance above the working floor for supporting rods.

3.31**Structural Safety Level (SSL)**

The classification of a drilling structure application by a purchaser to reflect various degrees of consequence of failure, considering life safety and other issues such as pollution, economic loss, and public concern.

3.32**substructure**

Any structure through which hook load, rotary load and/or setback load are transmitted.

3.33**wind environment**

The combination of rig configuration and load combinations to be considered with a given wind loading.

4 Product Specification Levels

This standard establishes requirements for two PSLs for drilling and well-servicing structures which define two levels of technical and quality requirements. These requirements reflect practices currently being implemented by a broad spectrum of the manufacturing industry. PSL 1 includes practices currently being implemented by a broad spectrum of the manufacturing industry. PSL 2 includes all the requirements of PSL 1 plus additional requirements.

5 Marking and Information

5.1 Nameplate

Drilling and well-servicing structures manufactured in accordance with this standard shall be identified by a nameplate bearing at least the information specified in 5.2 to 5.4, including the units of measurement where applicable. Markings shall be either raised or stamped. The nameplate shall be securely affixed to the structure in a conspicuous place.

5.2 Derrick and Mast Nameplate Information

The following information shall be provided:

- a) manufacturer's name;
- b) manufacturer's address;
- c) date of manufacture, including month and year;
- d) serial number;
- e) height, m (ft);
- f) maximum rated static hook load with guy lines, if applicable, for stated number of lines to travelling block, KN (short tons);
- g) maximum rated design wind velocity, V_{des} , at reference elevation of 10 m (33 ft) above mean sea level or ground, in knots, for 3-second gust duration with guy lines, if applicable, *with* rated capacity of pipe racked, m/s (knots);
- h) maximum rated design wind velocity, V_{des} , at reference elevation of 10 m (33 ft) above mean sea level or ground, in knots, for 3-second gust duration with guy lines, if applicable, *without* pipe racked, m/s (knots);
- i) elevation of base of derrick or mast above mean sea level or ground used in design for wind loading, m (ft);

- j) API Spec 4F, 3rd Edition;
- k) manufacturer's guying diagram, if applicable;
- l) the following text:

CAUTION Acceleration or impact, also setback, rods and wind loads will reduce the maximum rated static hook load capacity.

- m) manufacturer's load distribution diagram (may be placed in mast instructions);
- n) graph plotting allowable static hook load for wind velocities varying from zero to maximum design rated wind velocity, V_{des} , with full rated setback, and with maximum number of lines to travelling block;
- o) mast set-up distance for mast with guy lines, m (ft);
- p) PSL 2, if applicable; and
- q) supplementary information as specified in the particular SR, if applicable (see Annex A).

5.3 Substructure Nameplate Information

The following information shall be provided:

- a) manufacturer's name;
- b) manufacturer's address;
- c) date of manufacture, including month and year;
- d) serial number;
- e) maximum rated static hook load, KN (short tons);
- f) maximum rated static rotary capacity, KN (short tons);
- g) maximum rated pipe setback capacity, KN (short tons);
- h) maximum combined rated static hook and rated setback capacity, KN (short tons);
- i) maximum combined rated static rotary and rated setback capacity, KN (short tons);
- j) for substructures that support a mast or derrick, the following apply:
 - maximum rated design wind velocity, V_{des} , at reference elevation of 10 m (33 ft) above mean sea level or ground, in m/s (knots), for 3-second gust duration with guy lines, if applicable, *with* rated capacity of pipe racked;
 - maximum rated design wind velocity, V_{des} , at reference elevation of 10 m (33 ft) above mean sea level or ground, in m/s (knots), for 3-second gust duration with guy lines, if applicable, *without* pipe racked;
 - elevation of base of substructure above mean sea level or ground used in design for wind loading, m (ft);

- k) API Spec 4F, 3rd Edition;
- l) PSL 2, if applicable; and
- m) supplementary information as specified in the particular SR, if applicable (see Annex A).

5.4 Crown Block Assembly Nameplate Information (required only for crown block assemblies for use with derricks)

- a) manufacturer's name;
- b) manufacturer's address;
- c) date of manufacture, including month and year;
- d) serial number;
- e) maximum rated static hook load, KN (Short Tons);
- f) API Spec 4F, 3rd Edition;
- g) PSL 2, if applicable; and
- h) supplementary information as specified in the particular SR, if applicable (see Annex A).

6 Structural Safety Level

Drilling structures are qualified according to their SSL. The selection of the expected or the unexpected SSL (e.g. SSL E2/U1) is, by agreement, between manufacturer and purchaser for each specific location. For a given SSL and location, the design environmental conditions may be developed from the guidelines that follow.

The SSL level reflects various degrees of consequence of failure, considering life safety and other concerns such as pollution, economic loss, and public concern. It also reflects the expectation (expected or unexpected) of the environmental event. These SSLs are shown in the matrix below. Each structure will have two SSLs, the first for the expected environmental event, the second for the unexpected environmental event (e.g. SSL E2/U1).

Structural Safety Level (SSL)			
Life Safety	Other Concerns (Pollution, Economic Loss, Public Concern, etc.)		
	High	Medium	Low
High	E1 or U1	E1 or U1	E1 or U1
Medium	E1 or U1	E2 or U2	E2 or U2
Low	E1 or U1	E2 or U2	E3 or U3

Structural Safety Level E1 or U1—Structures with high consequences of failure.

Structural Safety Level E2 or U2—Structures with medium consequences of failure.

Structural Safety Level E3 or U3—Structures with low consequences of failure.

The prefix E refers to an *expected* environmental event, such as a large hurricane or storm, where preparation can be made prior to the event. The prefix U refers to an *unexpected* environmental event, such as a sudden

storm or earthquake, which does not allow for sufficient preparations. When a structure is evacuated in advance of an expected severe event, the SSL for the manned event may differ from the SSL for the evacuated severe event.

Transportable Drilling “Non-stationary” Structures

Drilling structures are commonly used in different locations during their lifetime, and the evaluation of their suitability for use in a given location must therefore account for the environmental conditions at that location, installation elevation, and the SSL of the new installation.

For identical SSLs, the design wind load for a *derrick* or *mast* is no different whether it is on a fixed or mobile installation (e.g. platform rig, jack-up, semi-submersible, or drillship).

7 Design Loading

Each drilling structure shall be designed for combinations of loads in accordance with Table 7.1, as applicable. The structures shall be designed to meet or exceed these conditions in accordance with the applicable design specifications of Section 8.

Table 7.1—Design Loadings

Case	Design Loading Condition	Dead Load ¹ (%)	Hook Load ² (%)	Rotary Load (%)	Setback Load (%)	Environmental Loads
1a	Operating	100	100	0	100	100% Operating Environment
1b	Operating	100	TE	100	100	100% Operating Environment
2	Expected	100	TE	100	0	100% Expected Storm
3a	Unexpected	100	TE	100	100	100% Unexpected Storm
3b	Unexpected	100	As applicable	As applicable	As applicable	100% Earthquake
4	Erection	100	As applicable	0	0	100% Operating Environment
5	Transportation	100	As applicable	0	As applicable	100% Transportation Environment

¹ For stability calculations, lower values of dead load shall be considered as in 8.8.

² For non-operating wind environments, the weight of all traveling equipment and drill lines suspended from the crown (TE) shall be considered in all load cases, as applicable.

8 Design Specification

8.1 Allowable Stresses

8.1.1 General

The steel structures shall be designed in accordance with AISC 335-89, except as further specified in this standard. The portion of AISC 335-89, *Allowable Stress Design*, commonly referred to as *Elastic Design*, shall be used in determining allowable unit stresses. Use of Part 5, Chapter N—*Plastic Design*, is not allowed. AISC 335-89 shall be used for determination of allowable unit stresses, except that current practice and experience do not dictate the need to follow AISC 335-89 for “members and their connections subject to fatigue loading” (Section K4) unless specified by purchaser, and for the consideration of secondary stresses.

For the purposes of this standard, stresses in the individual members of a latticed or trussed structure resulting from elastic deformations and rigidity of joints are defined as secondary stresses. These secondary stresses may be taken to be the differences between stresses from an analysis assuming fully rigid joints, with loads applied only at the joints, and those stresses from a similar analysis with pinned joints. Stresses arising from eccentric joint connection, or from transverse loading of members between joints, or from applied moments, shall be considered primary stresses.

Allowable unit stresses may be increased by 20 % when secondary stresses are computed and added to the primary stresses in individual members, for all loadings except earthquake. However, primary stresses shall not exceed the allowable unit stress. The increase in allowable stresses when secondary stresses are considered may be taken in addition to the increases allowed in 8.1.2.

Earthquake loading and the related allowable stresses are addressed specifically in 8.5.

8.1.2 Wind and Dynamic Stresses

For operating and erection conditions, allowable unit stresses shall not be increased (stress modifier = 1.0) over the basic allowable stresses defined in 8.1.1. For transportation conditions, allowable unit stresses may be increased one-third (stress modifier = 1.0) over the basic allowable stresses defined in 8.1.1, if specified by purchaser.

For the unexpected and expected design storm conditions, allowable unit stresses may be increased one-third (stress modifier = 1.33) over basic allowable stresses defined in 8.1.1 when produced by wind or dynamic loading acting alone or in combination with design dead and live loads.

For purposes of defining the nameplate graph of allowable static hook load versus wind velocity required by 5.2.n), a linear transition from a stress modifier of 1.0 for operating cases to 1.33 for the unexpected storm case may be used.

8.1.3 Wire Rope

The size and type of wire shall be as specified in ISO 10425 and by API RP 9B.

NOTE For the purposes of this provision, API Spec 9A is equivalent to ISO 10425.

A drilling structure raised and lowered by means of a wire rope assembly shall have the wire rope assembly designed to have a nominal strength of at least 2.5 times the maximum design load on the assembly during erection.

Guy lines shall be designed to have a nominal wire rope assembly strength of at least 2.5 times the maximum guy load resulting from a loading condition.

The strength of a wire rope assembly shall be derated for end connection efficiencies and for D/d ratios less than 18 in accordance with API RP 9B.

8.1.4 Crown Shafting

Crown shafts, including fastline and deadline sheave support shafts, shall be designed to AISC 335-89 (see 8.1.1) except that the factor of safety in bending shall be a minimum of 1.67 to yield. Wire rope sheaves and bearings shall be specified in accordance with ISO 13535 or API Spec 8A.

NOTE For the purposes of this provision, API Spec 8C is equivalent to ISO 13535.

8.2 Operating Loads

Operating loads shall consist of the following, alone or in combination per Table 7.1 and as specified by purchaser.

- a) Maximum rated static hook load, in combination with fastline and deadline loads, for each applicable string up condition.
- b) Maximum rated static rotary load.
- c) Maximum rated setback load.
- d) Dead load of drilling structure assembly.
- e) Fluid loads in all piping and tanks incorporated in drilling structures. Consideration shall be given to both full and empty tank conditions for stability calculations per 8.8.
- f) Additional simultaneous or independent loadings as agreed upon by purchaser and manufacturer due to ancillary equipment.

For all drilling structures, the manufacturer shall include in the rig manual a listing of all items with their total dry and wet weights used in the design. Additionally, the manufacturer shall state the total summation of weights and the first moment of these weights about the base of the drilling structure for both the dry and wet condition.

8.3 Wind Loads

8.3.1 Design Wind

Each drilling structure shall be designed for the following applicable values of design wind. Substructures shall be designed for the same wind speeds as the structures they support.

Drilling structures are to be classified according to their SSL and according to their location: onshore or offshore. The SSLs for drilling structures reflect various degrees of consequence of failure, considering life safety and other issues such as pollution, economic loss, and public concern.

The configuration of the drilling structure during a given wind environment shall be considered. The following wind environments are defined:

- a) operational wind—The wind below which unrestricted drilling operations may be continued;
- b) erection wind—The wind below which normal rig erection operations may be continued;
- c) transportation wind—The wind below which special transportation operations as specified by purchaser may be continued;

- d) unexpected wind—The wind from a sudden hurricane or storm where time for all preparations is insufficient, and setback therefore needs to be considered in the computation of the wind loading;
- e) expected wind—The wind from a known hurricane or storm where time is sufficient for preparations, such as lowering the setback.

8.3.1.1 Onshore Wind

The design reference wind velocity, V_{ref} , for the operating, erection and transportation environments shall be as specified by purchaser.

For non-operating design environments on land in the U.S., V_{ref} for expected storm conditions is to be obtained from the ASCE/SEI 7-05 wind speed map. For other onshore locations, V_{ref} shall be taken from a source such as a recognized standards agency or a governmental meteorological agency. The wind velocity chosen shall be a 3-second gust wind, in knots (1 knot = 1.15 mph), measured at 10 m (33 ft) in open terrain with an associated return period of 50 years.

For the unexpected wind condition where pipe setback might be racked in the drilling structure, V_{ref} shall be taken as no less than 75% of the expected storm V_{ref} .

For each wind environment, the maximum rated design wind velocity, V_{des} , for various SSLs is then determined by multiplying the design reference wind velocity, V_{ref} , by an onshore multiplier $\alpha_{onshore}$ as listed in Table 8.1, but not less than as specified in Table 8.3.

$$V_{des} = V_{ref} \times \alpha_{onshore}$$

The direction of the wind in all cases may be from any azimuth. The methodology for determining the local wind velocity to be used in the design is discussed in 8.3.1.3.

8.3.1.2 Offshore Wind

The design reference wind velocity, V_{ref} , for the Operating, Erection and Transportation environments shall be as specified by purchaser.

For the expected wind design environment, V_{ref} for offshore drilling structures shall be taken from ISO 19901-1, except that velocities for structures to be used in the Gulf of Mexico shall be obtained from API Bull 2INT-MET. This value shall represent a 3-second gust wind, in knots (1.15 mph = 1 knot = 0.514 m/s), measured at 10 m (33 ft) in open water with an associated return period of 100 years. For areas not specifically covered by these specifications, V_{ref} shall be taken from a source such as a recognized standards agency or a governmental meteorological agency, or a site specific study in accordance with ISO guidelines may be used.

For the unexpected wind condition where pipe setback might be racked in the drilling structure, V_{ref} shall be taken as 100 % of the expected storm V_{ref} , unless storm warning systems and rig operating procedures allow sufficient time for the laying down of setback before the expected wind storm event. In the Gulf of Mexico, V_{ref} for the unexpected wind condition shall be no less than 9.3 m/s (78 knots). For other tropical storm areas, site specific studies in accordance with ISO guidelines may be used to determine V_{ref} for the unexpected wind condition. This value shall represent a 3-second gust wind, in m/s (knots), measured at 10 m (33 ft) in open water with an associated return period of 100 years for the population of storms whose speed of formation and intensification allows sufficient warning to meet the operational window required for the safe laydown of a full setback.

For each wind environment, the maximum rated design wind velocity, V_{des} , for various SSLs is then determined by multiplying the design reference wind velocity, V_{ref} , by an offshore multiplier $\alpha_{offshore}$ as listed in Table 8.2, but not less than as specified in Table 8.3.

$$V_{des} = V_{ref} \times \alpha_{offshore}$$

The direction of the wind in all cases may be from any azimuth. The methodology for determining the local wind velocity to be used in the design is discussed in 8.3.1.3.

8.3.1.3 Local Wind Velocity

The maximum rated design wind velocity, V_{des} , calculated using Tables 8.1 and 8.2 is to be scaled by the appropriate elevation factor β to obtain the velocity to be used to estimate wind forces per 8.3.3.

$$V_z = V_{des} \times \beta$$

where

β is $\sqrt{0.85}$ for heights up to 4.6 m (15 ft);

β is $\sqrt{(2.01 \times (z / 900))^{0.211}}$ for heights > 4.6 m (15 ft) with z = height above ground level or mean sea level (ft);

β is tabulated in Table 8.4.

8.3.2 Wind Loading

Wind forces shall be applied to the entire structure, except that members directly behind or in front of windwalls may be excluded. Wind area calculations shall include all known or anticipated structures and appurtenances, e.g. equipment, windwalls and appendages installed in or attached to the drilling structure. The total wind force on the structure shall be estimated by the method as described in 8.3.3.

The manufacturer shall include in the rig manual a listing of all items with their unshielded projected area used in the design. This list shall include areas for at least two orthogonal directions. Additionally, the manufacturer shall state the total summation of areas and the first moment of areas about the base of the drilling structure in question for the chosen directions. For purposes of calculating the first moment of wind areas, the travelling equipment shall be assumed to be located at 0.7 times the clear height of the structure from the base.

8.3.3 Member-by-Member Method

The total wind force on the structure shall be estimated by taking the vector sum of wind forces acting on individual members and appurtenances. The wind directions must be determined and considered which result in stresses having the highest magnitude for each component part of the structure. Wind forces for the various design wind speeds shall be calculated in accordance with the following equations and tables:

$$F_m = 0.00338 \times K_i \times V_z^2 \times C_s \times A$$

$$F_t = G_f \times K_{sh} \times \Sigma F_m$$

where

F_m is wind force normal to longitudinal axis of an individual member, or normal to the surface of a wind wall, or normal to the projected area of an appurtenance, lb;

K_i is a factor to account for the angle of inclination ϕ between the longitudinal axis of an individual member and the wind;

is 1.0, when the wind is normal to member ($\phi = 90^\circ$), or for appurtenances including windwalls;

is $\sin^2 \phi$, when the wind is at an angle ϕ (in degrees) to the longitudinal axis of an individual member per 8.3.3.2;

V_z is local wind velocity in knots at height Z per 8.3.1.3;

C_s is shape coefficient per 8.3.3.4;

A is projected area of an individual member equal to the member length times its *projected width* with respect to the normal wind component per 8.3.3.5, or the normal surface area for a windwall, or the projected area for an appurtenance other than a windwall per 8.3.3.6, ft^2 ;

F_t is vector sum of wind forces acting on each individual member or appurtenance of the entire drilling structure;

G_f is gust effect factor to account for spatial coherence, per 8.3.3.3;

K_{sh} is a reduction factor to account for global shielding by members or appurtenances, and for changes in airflow around member or appurtenance ends, per 8.3.3.1;

F_t shall not be less than the vector sum of wind forces calculated for each individual member of the bare drilling structure.

8.3.3.1 Shielding and Aspect Ratio Correction Factor

A correction factor K_{sh} is used to account for global shielding effects and for changes in airflow around member or appurtenance ends. K_{sh} shall be applied only when calculating F_t .

For a derrick, K_{sh} is calculated based on the solidity ratio, ρ , and is applied to all structural members within the derrick frame.

$$K_{sh} = 1.11\rho^2 - 1.64\rho + 1.14 \quad 0.5 \leq K_{sh} \leq 1.0$$


When calculating K_{sh} for structural members, the solidity ratio ρ is defined as the projected area of all members in the front face of the bare frame divided by the projected area enclosed by the outer frame members, with projections normal to the wind direction.

When calculating global shielding effects for other derrick components including, but not limited to, wind walls, setback, guide racks, crown, vent pipe, top drive, and gin pole, K_{sh} shall equal 0.85.

For a mast the shielding and aspect ratio correction factor K_{sh} for all structural members or appurtenances shall equal 0.9 for all wind directions.

8.3.3.2 Member Angle of Inclination

The angle of inclination, ϕ , is defined as the angle in degrees between the *longitudinal* axis of a member and the wind direction (see the following figure).

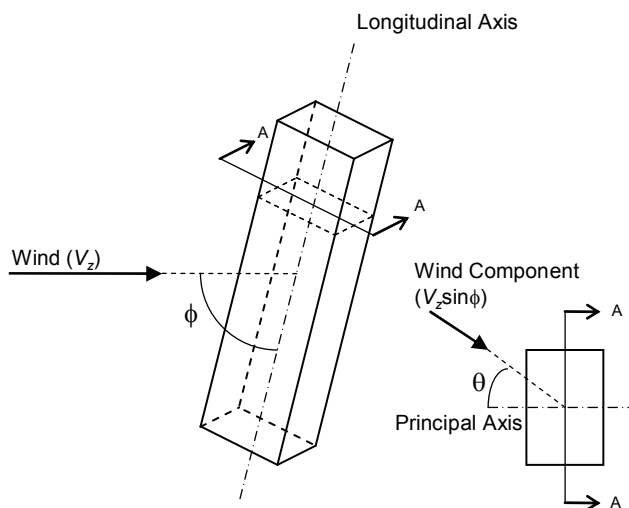

The member orientation angle, θ , is defined as the angle in degrees between the wind component acting perpendicular to the longitudinal axis and the principal axis of the member, with the principal axis normal to the longitudinal axis. The angle θ lies in a plane normal to the longitudinal axis, and is used to select a shape coefficient per 8.3.3.4. For wind walls, K_f equals 1.0.

8.3.3.3 Gust Effect Factor

A gust effect factor shall be applied as listed in Table 8.5. Selection of G_f shall be made based on the gross projected area of the drilling mast or derrick, defined as the area enclosed by the outer bay members with the projection normal to the wind direction. G_f is applied only when calculating the total wind force acting on the structure. It is not applied when calculating wind forces acting on individual members or appurtenances.


8.3.3.4 Member or Appurtenance Shape Coefficient

Representative coefficients for various shapes are provided in Table 8.6.

In portions of structures where large numbers of members are in close proximity, such as within a drill floor assembly, the member-by-member approach will overestimate wind forces on the assemblage. In such areas, the assemblage may be replaced by a blocked area with a corresponding shape factor of 1.5.

8.3.3.5 Member Projected Area

Calculation of the projected area, A , for an individual member is with respect to the wind component *normal to the longitudinal axis* ($V_z \sin \phi$). Thus, for all values of ϕ , the projected area for a member will equal the member length L times its projected width w with respect to the normal wind component. Moreover, the calculated wind force will act *normal to the longitudinal axis* (i.e. normal to the projected area) of the member (see the following figure).

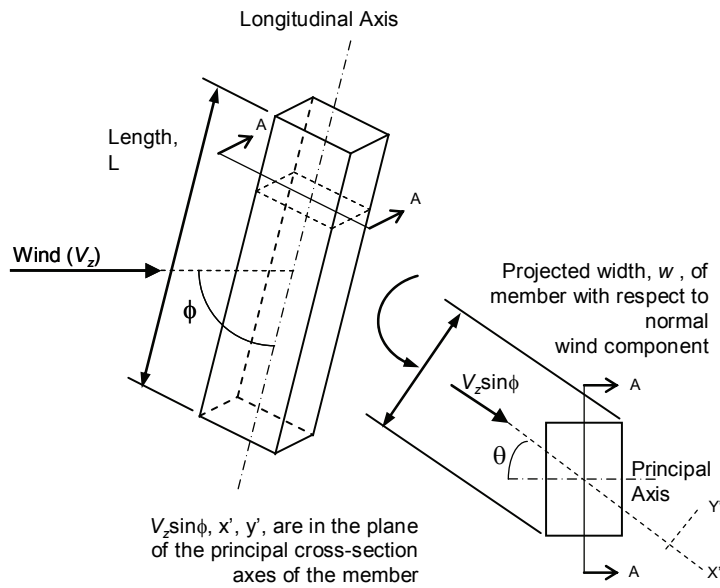

8.3.3.6 Appurtenance Projected Area

The projected area, A , for appurtenances other than windwalls shall be that area which projects onto a plane normal to the wind direction. Moreover, the calculated wind force will act in the same direction as the wind direction.

For wind walls, the area A for a given wall section equals its surface area. A positive sign for the shape coefficient means the resultant wind force acts toward the wall, while a negative sign means the resultant wind force acts away from the wall, with the resultant force acting normal to the wall. The shape coefficients for wind walls as shown in Table 8.6 apply only to a partially clad drilling *mast* or *derrick*. For cases where a drilling *mast* or *derrick* is completely covered with cladding (e.g. a rig mounted on an arctic drilling ship), other wind loading standards, specifically ASCE/SEI 7-05, are available and should be used to estimate wind loadings for such cases.

8.3.4 Wind Tunnel Tests

Wind tunnel tests, or similar tests using a fluid other than air, shall be considered acceptable for the purposes of determining forces and pressures, assuming Reynold's number is properly modelled.

8.3.5 Wind Dynamics

A dynamic analysis procedure shall be performed for wind-sensitive structures likely to experience additional loads due to the dynamic interaction between wind and structure. Detailed procedures for dynamic analysis of all classes of structures can be found in other published standards.

Table 8.1—Onshore Structural Safety Level Multiplier α_{onshore}

Case	Design Loading Condition	Structural Safety Level	SSL Multiplier α_{onshore}	Approximate Return Period (years)
1a	Operating	All	1.00	N.A.
1b	Operating	All	1.00	N.A.
2	Expected	E1	1.07	100
2	Expected	E2	1.00	50
2	Expected	E3	0.93	25
3	Unexpected	U1	1.07	N.A.
3	Unexpected	U2	1.00	N.A.
3	Unexpected	U3	0.93	N.A.
4	Erection	All	1.00	N.A.
5	Transportation	All	1.00	N.A.

Table 8.2—Offshore Structural Safety Level Multiplier α_{offshore}

Case	Design Loading Condition	Structural Safety Level	SSL Multiplier α_{offshore}	Approximate Return Period (years)
1a	Operating	All	1.00	N.A.
1b	Operating	All	1.00	N.A.
2	Expected	E1	1.09	200
2	Expected	E2	1.00	100
2	Expected	E3	0.91	50
3	Unexpected	U1	1.09	N.A.
3	Unexpected	U2	1.00	N.A.
3	Unexpected	U3	0.91	N.A.
4	Erection	All	1.00	N.A.
5	Transportation	All	1.00	N.A.

Table 8.3—Minimum Design Wind Speed, m/s (knots) V_{des}

	Onshore			Offshore		
	Operating and Erection	Unexpected	Expected	Operating and Erection	Unexpected	Expected
Guyed Masts	12.7(25)	30.7(60)	38.6(75)	21.6(42)	36(70)	47.8(93)
Un-guyed Masts	16.5(32)	30.7(60)	38.6(75)	21.6(42)	36(70)	47.8(93)
Derricks	16.5(32)	30.7(60)	38.6(75)	24.7(48)	36(70)	47.8(93)

Table 8.4^{1,2}—Elevation Factor, β
Location: All

Height Above Ground or MSL (m)	Height Above Ground or MSL (ft)	Elevation Factor
0 – 4.6	0 – 15	0.92
6	20	0.95
7.6	25	0.97
9	30	0.99
12.2	40	1.02
15.2	50	1.05
18.3	60	1.07
21.3	70	1.08
24.4	80	1.10
27.4	90	1.11
30.5	100	1.12
36.6	120	1.15
42.7	140	1.17
48.8	160	1.18
54.9	180	1.20
61	200	1.21
76.2	250	1.24
91.4	300	1.26
106.7	350	1.28
121.9	400	1.30
137.2	450	1.32
152.4	500	1.33

¹ Linear interpolation for intermediate values of height is acceptable.

² At 10 m (33 ft) value equals 1.00.

Table 8.5—Gust Effect Factor

Gross Projected Area (m ²)	Gross Projected Area (ft ²)	Factor
> 65	> 700	0.85
37.2 – 65	400 – 700	0.90
9.3 – 37.1	100 – 399	0.95
< 9.3	< 100	1.00

Table 8.6—Shape Coefficients











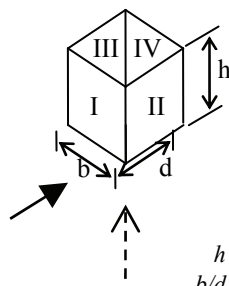
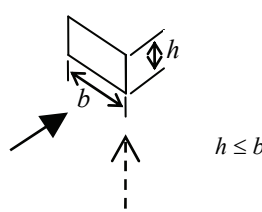
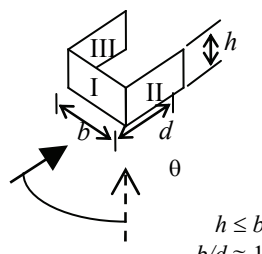
Section		Wind Orientation (θ): All Directions
Type	Shape	
Structural	Angles, Channels, Beams, Tees	 1.8
	Built-up Members	 2.0
Tubular	Square	 1.5
	Rectangular	 1.5
	Round	 0.8
Attachments	Any member, other than a structural member, with flat edges (e.g. crown cluster, ducs, traveling block, hook, top drive)	 1.2
	Any member, other than a tubular member, with a continuous surface, i.e. no flat edges (e.g. stand pipes, hoses, collars, cables)	 0.8

Table 8.6—Shape Coefficients (continued)

Section		Wind Orientation (θ): All Directions	
Type	Shape		
Set-back Pipes and Rods	Square or Rectangular		1.2
			I and II: 1.2
	Semi-circular		1.2

			0° ± 20° to Normal	45° ± 25° to Diagonal																									
Wind Walls	Four-sided: airflow permitted into enclosure	 $h \leq b$ $b/d \cong 1$	I: 0.8 II: -0.5 III: -0.5 IV: -0.3	I: 0.5 II: 0.5 III: -0.5 IV: -0.5																									
	Single-sided	 $h \leq b$	1.1	0.6																									
	Three-sided: airflow permitted into enclosure	 $h \leq b$ $b/d \cong 1$	<table><tr><th>θ</th><th>I</th><th>II</th><th>III</th></tr><tr><td>0°</td><td>0.8</td><td>-0.5</td><td>-0.5</td></tr><tr><td>45°</td><td>0.5</td><td>0.5</td><td>-0.5</td></tr><tr><td>90°</td><td>-0.5</td><td>0.8</td><td>-0.3</td></tr><tr><td>135°</td><td>-0.5</td><td>0.5</td><td>-0.9</td></tr><tr><td>180°</td><td>1.2</td><td>-0.2</td><td>-0.2</td></tr></table>	θ	I	II	III	0°	0.8	-0.5	-0.5	45°	0.5	0.5	-0.5	90°	-0.5	0.8	-0.3	135°	-0.5	0.5	-0.9	180°	1.2	-0.2	-0.2		
θ	I	II	III																										
0°	0.8	-0.5	-0.5																										
45°	0.5	0.5	-0.5																										
90°	-0.5	0.8	-0.3																										
135°	-0.5	0.5	-0.9																										
180°	1.2	-0.2	-0.2																										

Note:
+ toward surface
- away from surface

Note:
Round value of θ to nearest table value

8.4 Dynamic Loads

8.4.1 Inertial Loads

The purchaser shall supply all motion information required for analysis of the drilling structures for dynamic loads due to motions of supporting vessel, compliant platform or deepwater fixed structure. Forces due to motions shall be calculated by rational methods as appropriate to the form of the motion data.

As a minimum, dynamic forces shall be combined as follows.

- a) Longitudinal dynamic forces, to include surge and pitch, with heave.
- b) Transverse dynamic forces, to include sway and roll, with heave.
- c) Diagonal dynamic forces combined with heave. Diagonal dynamic forces shall be determined as the square root of the sum of squares of longitudinal and transverse forces unless otherwise specified by purchaser.

A static analysis of the drilling structure may be made using the motions of the supporting structure as defined above, provided that the drilling structure is sufficiently stiff to be treated as a rigid body.

8.4.2 Dynamic Amplification

A dynamic analysis procedure shall be performed for drilling structures likely to experience additional loads due to dynamic amplification caused by motions of the foundation support structure. Detailed procedures for dynamic analysis of all classes of structures can be found in other published references. The purchaser shall be responsible for supplying the necessary motion information for the supporting structure.

8.5 Earthquake Loads

Earthquake consideration is a special loading condition to be addressed if specified by the user. The user is responsible for furnishing the design criteria, which include design loading, the design analysis method and allowable response.

The design criteria for land-based units may be in accordance with local building codes, using equivalent static design methods.

For a unit based on an offshore platform, the design method for earthquake loading shall follow the strength level analysis guidelines outlined in API RP 2A-WSD. The drilling and well-servicing units shall be designed to resist the movement of the deck on which they are founded, i.e. the response of the deck to the ground motion prescribed for the design of the offshore platform. The allowable stresses for the combined earthquake, gravity and operational loading may be increased one-third (stress modifier = 1.33) over basic allowable stresses defined in 8.1.1. The computed stresses should include both the primary and the secondary stress components.

8.6 Erection Loads

Each drilling structure and its supporting structure shall be designed for erection loads in combination with dead loads and erection environment wind, or alternatively, for wind and inertial loads as specified by purchaser.

Fluid loads or added dead loads such as counterweights specifically required to provide overturning stability during erection shall be clearly specified on the drilling structure nameplate and in rig operating instructions.

Drilling structures designed to be crane erected shall be designed in accordance with the guidelines for lifting in API RP 2A-WSD, including dynamic factors as specified therein.

8.7 Transportation Loads

Each drilling structure shall be designed for transportation loads in combination with dead loads and transportation environment wind, or alternatively, for wind and inertial loads, as specified by purchaser.

8.8 Overturning and Sliding

The maximum allowable static coefficient of friction to be used in overturning or inadvertent rig sliding calculations of drilling structures supported by soil, concrete or wood matting foundations shall be limited to 0.15, and to 0.12 for those supported by steel foundations, except as follows: alternative values for the maximum design coefficient of friction may be used provided such values have been validated thru testing and are consistent with rig operating procedures (e.g. an offshore skiddable rig design incorporating a coefficient of friction consistent with ungreased surfaces would require that the owner/operator maintain and inspect the beams to ensure that they are not inadvertently greased).

For all stability and sliding calculations, dead weights providing resistance to overturning or sliding shall be limited to a maximum of 90 % of their expected minimum weight. The calculation of minimum weight shall assume the removal of all optional structures and equipment, and fluid tanks shall be considered empty, unless otherwise specified in the rig instructions for storm preparations or rig erection. For drilling structures subject to vertical heave, the stabilizing weights shall be further reduced by the magnitude of the negative heave acceleration.

Freestanding structures on land shall have a minimum factor-of-safety against overturning of 1.25, calculated as the ratio of the minimum stabilizing moment of the dead weight of the structure, taken about a tipping line, divided by the overturning moment of the sum of any overhanging vertical live loads plus environmental loads, including wind, earthquake or dynamic loads due to vessel motion, taken about the same tipping line or axis. The designer shall consider suitable tipping lines so as to determine the minimum factor of safety and shall consider the possibility of overturning loads from any possible direction of application. Determination of the location of a tipping line shall be such that the tipping line shall lie along the centroid of the nominal vertical ground support reactions for the case considered; the distribution of ground support reactions shall be limited to comply with design allowable ground bearing pressures for the structures under consideration. The manufacturer shall include foundation loading diagrams and the required safe ground bearing pressure allowables for erection and operating conditions in the rig manual. Freestanding land drilling structures shall have a minimum factor of safety against inadvertent sliding of 1.25, calculated as the ratio of the minimum sliding resistance at the design maximum allowable static coefficient of friction, divided by the total applied shear loads due to environmental loads.

Freestanding offshore drilling structures shall have a minimum factor-of-safety against overturning of 1.50, calculated as the ratio of the minimum stabilizing moment of the dead weight of the structure, taken about a tipping line, divided by the overturning moment of the sum of any overhanging vertical live loads plus environmental loads, taken about the same tipping line or axis. The designer shall consider suitable tipping lines so as to determine the minimum factor of safety and shall consider the possibility of overturning loads from any possible direction of application. Determination of the location of a tipping line shall be such that the tipping line shall lie along the centroid of the nominal foundation support reactions for the case considered. The distribution of foundation support reactions shall be limited to comply with allowable design loadings of the supporting structures foundations, if so specified by Purchaser. The manufacturer shall include diagrams defining the maximum foundation support loads based on the factored lateral loads with the rig instructions. Freestanding offshore drilling structures shall have a minimum factor of safety against inadvertent sliding of 1.5, calculated as the ratio of the minimum sliding resistance at the design maximum allowable static coefficient of friction, divided by the total applied shear loads due to environmental loads.

Structures which are unable to meet the requirements for freestanding structures shall incorporate suitable devices to prevent such movements, collectively labelled as tie down clamps. These devices shall be rated to resist overturning and sliding loads in all load combinations calculated using overhanging vertical live loads, design lateral wind, seismic and dynamic forces due to vessel motion factored by a value of 1.25, at AISC allowable stress levels without the $\frac{1}{3}$ increase for wind or dynamic loading.

Some structural connections provide two methods or paths for carrying loads. An example of such a dual-load path connection is a derrick leg splice with flange connections, where compression is carried by the bearing of one flange plate on the other and tension is carried by bolts in tension. Mast legs designed to carry compression loads by contact bearing and tension loads thru pin connections are another example.

In addition to meeting the requirements of 8.1, dual load path connections, other than tie-down clamps, shall also be designed to resist primary loads calculated using overhanging vertical live loads, design lateral wind, seismic and dynamic forces due to vessel motion, as appropriate, factored by a value of 1.25:

- in all operating and erection load combinations with a $1/3$ increase in allowable stresses;
- in expected and unexpected wind load combinations with a $2/3$ increase in allowable stresses;
- in transportation load combinations with a $1/3$ increase in allowable stresses, or $2/3$ increase in allowable stresses if so specified by purchaser.

In no case shall the absolute value of the design loadings for one load path of a dual load path connection be less than 20 % of those of the alternate load path.

The manufacturer shall provide suitable instructions in the drilling structure documentation to be delivered with the unit regarding the proper installation of clamps, pins and bolts used for tie downs. Tie down components incorporating bolts which are expected to be tensioned multiple times shall be designed with specified preloads of bolts no greater than 50 % of the bolt material minimum ultimate strength times its nominal cross-sectional area, so as to allow reuse of the bolts. Clamp installation instructions shall include pretension values and tolerances. Bolt tensioning shall be achieved using calibrated tensioning methods. Bolts that are specified to be pretensioned to higher values shall only be used once.

The rig owner/operator shall develop procedures to include storm preparation information including proper clamp installation, based on manufacturer's recommendations.

8.9 Design Verification

See 11.7.2 for requirements.

9 Materials

9.1 General

This section describes the various material qualifications, property and processing requirements for critical components, unless otherwise specified.

All materials used in the manufacture of equipment furnished under this standard shall be suitable for the intended service.

9.2 Written Specifications

Material shall be produced to a written material specification. The specification requirements shall define at least the following parameters and limitations:

- a) mechanical property requirements;
- b) chemical composition and tolerances;
- c) material qualification.

9.3 Mechanical Properties

Materials shall meet the property requirements specified in the manufacturer's material specification.

If specified by the purchaser, the supplementary impact toughness requirements in Annex A, A.1, shall apply.

9.4 Material Qualification

The mechanical tests required by this standard shall be performed on qualification test coupons representing the heat and heat-treatment lot used in the manufacture of the component. Tests shall be performed in accordance with the requirements of ASTM A370 or equivalent standards, using material in the final heat-treated condition.

Qualification test coupons shall be either integral with the components they represent or separate from the components or a sacrificial product part. In all cases, test coupons shall be from the same heat as the components which they qualify, given the same working operations, and shall be heat-treated with the components.

9.5 Material Manufacture

All wrought materials shall be manufactured using processes which produce a wrought structure throughout the component.

For PSL 2, all heat-treatment operations shall be performed utilizing equipment qualified in accordance with the requirements specified by the manufacturer or processor. The loading of the material within heat-treatment furnaces shall be such that the presence of any one part does not adversely affect the heat-treatment lot. The temperature and time requirements for heat-treatment cycles shall be determined in accordance with the manufacturer's or processor's written specification. Actual heat-treatment temperature and times shall be recorded and heat treatment records shall be traceable to relevant components.

9.6 Bolts

Bolts which conform to a recognized industry standard shall be marked in accordance with such standard. Other bolts may be used provided the chemical, mechanical and physical properties conform to the limits guaranteed by the bolt manufacturer.

9.7 Wire Rope

Wire rope for guy line or erection purposes shall conform to ISO 10425.

NOTE For the purposes of this provision, API Spec 9A is equivalent to ISO 10425.

10 Welding Requirements

10.1 General

This section describes requirements for the welding of critical components.

10.2 Welding Qualifications

All welding undertaken on components shall be performed using welding procedures which are in accordance with AWS D1.1 or similarly recognized industry standard.

This welding shall only be carried out by welders or welding operators who are qualified in accordance with aforementioned standards. Workmanship and technique shall be in accordance with the same standard.

10.3 Written Documentation

Welding shall be performed in accordance with welding procedure specifications (WPS) written in accordance with the applicable standard. The WPS shall describe all the essential variables as listed in the applicable standard.

The use of prequalified joint details as specified in AWS D1.1 is acceptable. The manufacturer shall have a written WPS for prequalified joints.

Weld joints and/or process not meeting AWS D1.1 requirements for prequalification shall be qualified in accordance with the applicable standard. The procedure qualification record (PQR) shall record all essential and supplementary essential (when required) variables of the weld procedure used for the qualification tests. Both WPS and the PQR shall be maintained as records in accordance with the requirements of Section 12 of this standard.

10.4 Control of Consumables

Welding consumables shall conform to American Welding Society (AWS) or consumable manufacturers' specifications.

The manufacturer shall have a written procedure for storage and control of weld consumables. Materials of low hydrogen type shall be stored and used as recommended by the consumable manufacturer to retain their original low hydrogen properties.

10.5 Weld Properties

For all procedures requiring qualification, the mechanical properties of the weld, as determined by the procedure qualification test, shall at least meet the minimum specified mechanical properties required by the design. If impact testing is required for the base material, it shall also be a procedure qualification requirement. Results of testing in the weld and base material heat-affected-zone (HAZ) shall be consistent with requirements of the base material. In the case of attachment welds, only the HAZ of materials requiring impact testing must meet the above requirements.

For ASTM and API steels, corresponding weld metal and HAZ impacts are defined in Tables C-4.1 and C-4.2 of AWS D1.1-2002. For international steels selected on the basis of lowest anticipated service temperature (LAST), corresponding weld metal and HAZ impacts are defined in the Material Category method of ISO 19902 (when published; Annex F1 in the September 2005 MWIFQ draft).

All weld testing shall be undertaken with the test weldment in the applicable post-weld heat-treated condition.

10.6 Post-weld Heat Treatment

Post-weld heat treatment of components shall be in accordance with the applicable qualified (WPS).

10.7 Quality Control Requirements

Requirements for quality control of permitted welds shall be in accordance with Section 11.

10.8 Specific Requirement—Repair Welds

10.8.1 Access

There shall be adequate access to evaluate, remove and inspect the nonconforming condition which is the cause of the repair.

10.8.2 Fusion

The selected WPS and the available access for repair shall be such as to ensure complete fusion with the base material.

10.8.3 Heat Treatment

The welding procedure specification used for qualifying a repair shall reflect the actual sequence of weld repair and heat treatment imparted to the repaired item.

11 Quality Control

This section specifies the quality control requirements for equipment and material. All quality control work shall be controlled by the manufacturer's documented instructions which shall include appropriate methodology, quantitative and qualitative acceptance criteria.

The manufacturer shall have a program to ensure that the quality of products is planned, implemented and maintained. The quality programme shall be described in a quality manual, the issuance and revision of which shall be controlled and shall include a method to identify the latest revisions in the manual.

The acceptance status of all equipment, parts and materials shall be indicated either on the item or in the records related to the equipment, parts or materials.

11.1 Quality Control Personnel Qualifications

11.1.1 Non-destructive examination (NDE) personnel shall be qualified and/or certified in accordance with ISO 9712.

NOTE For the purposes of this provision, ASNT TC-1A is equivalent to ISO 9712.

11.1.2 Personnel performing visual inspection of welding operations and completed welds shall be qualified and certified as follows:

- a) AWS certified welding inspector,
- b) AWS certified associate welding inspector, or
- c) a welding inspector certified by the manufacturer's documented requirements.

11.1.3 All personnel performing other quality control activities directly affecting material and product quality shall be qualified in accordance with the manufacturer's documented procedures.

11.2 Measuring and Test Equipment

Equipment used to inspect, test or examine material or other equipment shall be identified, controlled, calibrated and adjusted at specific intervals in accordance with the manufacturer's documented procedures, and consistent with a recognized industry standard to maintain the required level of accuracy.

11.3 Non-destructive Examination

11.3.1 General

Instructions for NDE activities shall be detailed regarding the requirements of this standard and those of all applicable referenced specifications. All NDE instructions shall be approved by an examiner qualified to ISO 9712, Level 3.

NOTE For the purposes of this provision ASNT TC-1A level III is equivalent to ISO 9712, Level 3.

If examination is required it shall be done after final heat treatment.

The requirements of 11.3 shall apply to all critical components as designated by manufacturer's design engineering department unless specified otherwise.

11.3.2 Visual Examination

All critical welds shall be 100 % visually examined.

11.3.3 Surface NDE

Twenty percent (20 %) of critical welds shall be inspected using magnetic particle (MP) or liquid penetrant (LP) method in accordance with Section 6 of AWS D1.1. The manufacturer's inspector shall choose areas for random inspection coverage.

11.3.4 Volumetric NDE

All full- or partial-penetration welds loaded in tension to 70 % or greater of their allowable stress, as determined by design, shall be ultrasonically or radiographically inspected in accordance with Section 6 of AWS D1.1. The manufacturer's design engineering department shall document the welds which require volumetric NDE.

For PSL 2, through-thickness NDE. Connections in critical components with through-thickness tensile stresses greater than 70 % of allowable stress, as determined by design, shall be ultrasonically inspected for laminations and internal discontinuities in accordance with ASTM A578, with the following changes.

- The area to be examined shall include the weld area and adjacent areas up to 76 mm from the weld. The area shall be 100 % scanned.
- The following discontinuities shall be recorded and referred to the manufacturer's design engineering department for disposition:
 - all discontinuities causing a 50 % loss of initial backwall regardless of size;
 - all discontinuities with amplitudes greater than 50 % of initial backwall which cannot be contained in a 25 mm circle (1 in.); and
 - any discontinuities which in the technician's judgment would interfere with the ultrasonic inspection of the completed weldment.

The manufacturer's design engineering department shall review all recordings and determine repair requirements, if any.

All recordings and dispositions shall be documented and records retained in accordance with Section 12.

11.3.5 Acceptance Criteria

The acceptance criteria of AWS D1.1 for statically loaded structures shall be used for the visual, surface and volumetric NDE examination.

PSL 2—The acceptance criteria of AWS D1.1 for cyclically loaded structures shall be applied to critical welds of masts and derricks.

11.4 Dimensional Verification

Verification of dimensions shall be carried out on a sample basis as defined and documented by the manufacturer.

11.5 Workmanship and Finishing

11.5.1 Structural Steel

Structures and products produced shall conform to applicable sections of the AISC 335-89, concerning fabrication.

11.5.2 Castings

All castings shall be thoroughly cleaned, and all cored holes shall be drifted to ensure free passage of proper size bolt.

11.5.3 Protection

All forged, rolled structural steel shapes and plates, and castings shall be cleaned, primed and painted with a good grade of commercial paint or other specified coating before shipment. Machined surfaces shall be protected with a suitable lubricant or compound.

11.5.4 Socketing

Socketing of raising, erection, or telescoping mast wire ropes shall be performed in accordance with practices outlined by API RP 9B. Socketed connections shall be proof-tested in accordance with 11.7.3.

11.6 Purchaser's Inspection and Rejection

11.6.1 Inspection Notice

If the inspector representing the purchaser requests to inspect the product, the product at the works or witness test, the manufacturer shall give the inspector reasonable notice as to available inspection dates.

11.6.2 Inspection

While work on the purchaser's product is being performed, the purchaser's inspector shall have free entry at all times to all parts of the manufacturer works concerned with the manufacture of the products ordered. The manufacturer shall afford the inspector, without charge, all reasonable facilities to satisfy him that the product is being manufactured in accordance with this standard. All inspections should be made at the place of manufacture prior to shipment, unless otherwise specified on the purchase order, and shall be so conducted as not to interfere unnecessarily with operation of works. Such interference shall be grounds for refusal of inspection by the manufacturer.

11.6.3 Rejection

Material which shows injurious defects on inspection subsequent to acceptance at manufacturer's works, or which proves defective when properly applied in service, may be rejected and the manufacturer so notified in writing. If tests that require the destruction of material are made, the purchaser shall pay for the material which meets the specification, but shall not pay for the material which fails to meet the specification.

11.6.4 Records

Full records of all calculations and tests shall be maintained by the manufacturer. If requested by an actual purchaser of the equipment for his use, or by a user of the equipment, the manufacturer shall make available for examination details of computations, drawings, test, or other supporting data as may be necessary to

demonstrate compliance with this standard. It shall be understood that such information is for the sole use of the user or prospective purchaser for the purpose of checking the equipment rating for compliance with this standard, and that the manufacturer shall not be required to release the information from his custody.

11.7 Testing

11.7.1 Proof Load Testing

Proof load testing of products manufactured to this standard is not a requirement of this standard. If specified by the purchaser, proof load testing shall be in accordance with Annex A, A.2.

11.7.2 Design Verification

The accuracy of the standard design ratings of each structure shall be tested by proof loading or by a computer model such as Finite Element Analysis (FEA). The intent of such testing shall be to verify the structure for the design loadings specified in Section 7.

Testing methods and assumptions shall be documented. Computer modelling documentation shall include loads, member properties, model geometry and connectivity, member effective-length factors and unbraced lengths, support conditions, member end fixities and analysis results demonstrating compliance with Section 8. Documentation shall be verified by a qualified individual other than the designer of the test or computer model.

11.7.3 Wire Rope Connections

Wire rope end connections used for erection purposes shall be proof-tested to 50 % of nominal wire rope nominal assembly strength.

11.7.4 Cylinders and Winches

Cylinders and winches used for erection of masts or substructures shall be pressure-tested to 1.5 times the system design working pressure. The test pressure shall be maintained for a duration of 10 min.

11.8 Traceability

The manufacturer shall obtain and retain a material test report on all steel material received having a specified yield strength greater than the following:

structural shapes or plate	248 MPa (36 ksi);
tubing	317 MPa (46 ksi);
solid round bars	414 MPa (60 ksi).

Any substitution of an alternative material to that called out in the engineering drawing or instructions should be documented and traceable to the specific unit by serial number or similar specific identification.

For PSL 2, critical components shall be traceable by heat and heat-treatment lot identification. Identification shall be maintained through all stages of manufacturing, traceable to the specific unit by a serial number.

For PSL 2, certified reports shall constitute sufficient evidence of conformity for nonferrous materials and bearings.

For PSL 2, bolts shall be exempt from the traceability requirements, provided they are manufactured and marked in accordance with recognized industry standards.

12 Documentation

12.1 General

Full records of any documentation referenced in this standard shall be kept by the manufacturer for a period of five years after the equipment has been manufactured and sold. Documentation shall be clear, legible, reproducible, retrievable and protected from damage, deterioration or loss.

All quality control records required by this standard shall be signed and dated. Computer-sorted records shall contain originator's personal code.

If requested by a purchaser of the equipment, authorities or certifying agencies, the manufacturer shall make available all records and documentation for examination to demonstrate compliance with this standard.

12.2 Documentation to be Kept by the Manufacturer

The following documentation shall be kept by the manufacturer:

- a) design documentation (see 8.5);
- b) written specifications (see Sections 9, 10 and 11);
- c) qualification records such as:
 - 1) weld-procedure qualification records;
 - 2) welder qualification records;
 - 3) NDE-personnel qualification records;
 - 4) measuring and test equipment calibration records;
- d) inspection and test reports covering the following tests, as applicable:
 - 1) material test reports covering the following tests, as applicable:
 - a) chemical analysis;
 - b) tensile tests;
 - c) impact tests;
 - d) hardness tests;
- e) NDE records covering the surface and/or volumetric NDE requirements of Section 10;
- f) performance test records, where applicable, including:
 - 1) proof load-testing records;
 - 2) hydrostatic pressure-testing records;
 - 3) slingline socket proof-testing records;
- g) special process records, where applicable.

12.3 Documentation to be Delivered with Equipment

12.3.1 Instructions

The manufacturer shall furnish to the purchaser one set of instructions that covers operational features, block revving diagram, and lubrication points for each drilling or well-servicing structure. Instructions shall be included to include erection and lowering of the mast and/or substructure. A facsimile of the nameplate shall be included in the instructions.

Tables summarizing wet and dry dead weights of the drilling structure and all appurtenances and their first moments about the base of the drilling structure used in design shall be included per 8.2.

Tables summarizing wind areas and their first moment about the base of the drilling structure used in design shall be included per 8.3.2.

12.3.2 Data Book

If specified by the purchaser, a comprehensive data book shall be provided in accordance with Annex A, A.3.

Annex A

(normative)

Supplementary Requirements

A.1 SR1—Low-temperature Testing

This supplementary requirement shall apply when specified by purchaser. In all cases, the purchaser and manufacturer shall agree upon the minimum design temperature and impact-test result requirements.

Critical components shall be fabricated from materials possessing the specified notch toughness at the required minimum design temperature. Impact testing shall be performed in accordance with the requirements of ASTM A370.

If it is necessary for sub-size impact test pieces to be used, the acceptance criteria shall be multiplied by the appropriate adjustment factor listed in Table A.1. Sub-size test pieces of width less than 5 mm are not permitted.

Table A.1—Adjustment Factors for Sub-size Impact Specimens

Specimen Dimensions mm × mm	Adjustment Factor
10.0 × 7.5	0.833
10.0 × 5.0	0.667

Weldment qualification by impact testing shall be performed in accordance with Annex III of AWS D1.1-2002.

Products meeting this SR shall have their nameplate stamped with SR1 and with the design minimum temperature, in degrees Celsius. Impact value requirements for the various base metals shall be stated in the rig instructions.

A.2 SR2—Proof Load Test

The equipment shall be load-tested to a load agreed by the purchaser and manufacturer. After load testing, the equipment shall be visually examined in accordance with 11.3.2 of this standard.

The equipment shall have its nameplate stamped with SR2 and the ratio of load test to design load (load test/design load), e.g. SR2-1.0.

A.3 SR3—Data Book

If specified by the purchaser, records shall be prepared, gathered and properly collated in a data book by the manufacturer. The data book shall include for each unit at least:

- a) statement of compliance;
- b) equipment designation/serial number;
- c) assembly and critical-area drawings;

- d) nominal capacities and ratings;
- e) list of components;
- f) traceability codes and systems (marking on parts/records on file);
- g) steel grades;
- h) heat-treatment records;
- i) material test reports;
- j) NDE records;
- k) performance test records, including functional hydrostatic and load-testing certificates (when applicable);
- l) SR certificates as required;
- m) welding-procedure specifications and qualification records; and
- n) instructions.

Annex B (informative)

Commentary

NOTE Paragraph numbering aligns with the body of this document. Not all sections have commentary.

B.1 Scope

Products manufactured according to API Standards 4A, 4D, 4E, and previous revisions of API Spec 4F may not necessarily comply with all the requirements of this specification. It is the committee's intention that this standard be written to meet the requirements of present and future operating conditions, such as deeper drilling, offshore drilling from floating devices, and the effect of earthquakes, storms, and other adverse operating conditions.

This standard is written to serve as a guide by whom the manufacturer and user will have a common understanding of the capacities and ratings of the various structures for drilling and well servicing operations.

B.6 Structural Safety Level

Prior editions of this specification differentiated between derricks and masts, with the implicit assumption that masts had either lower consequences of failure or lower probability of failure (a mast might be laid down in preparation for a large storm). Specifying lower design wind speeds for masts relative to derricks reflected this assumption. The present specification eliminates this distinction.

A given mast or derrick is usually designed with the following set of parameters (to simplify this discussion, the earthquake condition is excluded):

- Rated Hook Load, HL
- Rated Setback, SB
- Operational Wind, W_o
- Design Expected Wind, W_e
- Design Unexpected Wind, W_u

If the mast or derrick were designed for a SSL E3/U2 for an area of severe environmental conditions, then it might be utilized for SSL E2/U1 operations in a region with a less severe environment. In other words, the classification of a rig by its SSL has meaning only when it is operating within a region of similar environmental conditions. A shift in qualification of SSLs is not anticipated to occur within a given geographical location, such as the Gulf of Mexico if the operational strategy is unchanged.

By defining the SSL as a dual parameter, the operator/lessee has more latitude in assessing the consequences of the expected or survival condition when the rig is often unmanned. The following six SSLs are considered possible:

- SSL E1/U1
- SSL E2/U1
- SSL E3/U1
- SSL E2/U2

- SSL E3/U2
- SSL E3/U3

whereas

- SSL E1/U2
- SSL E1/U3
- SSL E2/U3

are considered to be unrealistic. That is, rig overload is always equal or more consequential for the unexpected condition than for the expected condition.

In some areas, such as in tropical revolving storm areas like the Gulf of Mexico, structures are evacuated in advance of an extreme environmental event. In such cases, an SSL for the manned event may be a higher order when personnel are not present during the severe event. In these cases the unmanned SSL may be lower than the higher extreme event.

When specifying dynamic load conditions due to platform or vessel motion, the user might consider use of motions for the same approximate return period as is used for the design wind loads, as this would presumably be consistent with the chosen SSL for the drilling structure.

Existing Onshore Structures

Qualification of an existing rig needs to reflect the results of inspections such as that required in API RP 4G.

The selection of the onshore SSL multipliers in Table 8.1 is based on a target of equivalence between the expected wind loading as specified by API Spec 4F, 2nd Edition and the wind loading in this specification. It is thought that guyed masts properly designed to API Spec 4F, 2nd Edition would likely meet the requirements of this specification for use in the non-coastal areas of the U.S. for SSL E3/U3. Similarly, it is thought that unguyed masts properly designed to API Spec 4F, 2nd Edition would likely meet the requirements of this specification for use in the non-coastal areas of the U.S. for SSL E1/U1.

The degree to which that target is met has been biased by experience and judgment.

Existing Offshore Platforms

Qualification of an existing rig needs to reflect the results of inspections, such as that required in API RP 4G.

The selection of the SSLs of existing derricks and masts for offshore operations is based on a target of equivalence between the wind loading as specified by API Spec 4F, 1st Edition and the wind loading in this specification. It is thought that masts properly designed to API Spec 4F, 2nd edition would likely meet the requirements of this specification for use in all but the Central region of the Gulf of Mexico for SSL E3/U3. Similarly, it is thought that derricks properly designed to API Spec 4F, 2nd edition would likely meet the requirements of this specification for use in all but the central region of the Gulf of Mexico for SSL E2/U2.

The degree to which that target is met has been biased by experience and judgment.

Transportable Drilling “Non-stationary” Structures

When a drilling structure is considered for use in a new location, the new base elevation of the drilling structure may be different than the nameplate base elevation. This difference must be considered in the evaluation of the suitability of the structure for use at the new location.

The design wind loads for a drilling structure per this specification are typically greater than the wind loads used in the global response analysis of a mobile or floating platform where spatial and combined loads are used. The appropriate global wind loading of mobile, floating, or fixed platforms is beyond the scope of this document. The user should consult with appropriate design documents for these conditions.

B.7 Design Loading

Operating, erection and transportation load cases include a purchaser-defined wind velocity, to be not less than a specified minimum depending on type of structure and application (onshore or offshore).

No increase in allowable stresses is allowed for operating or erection cases with wind or inertia forces. The nameplate curve of hook load versus wind velocity is made using a linear transition from a stress modifier of 1.0 for operating cases to 1.33 for the unexpected storm case.

The choice of the wind velocity for operating cases is not considered a structural safety concern as it is generally trivial to reduce hook load by setting the pipe string off in the rotary slips; rather, the level chosen represents a trade-off of costs and benefits to the user—higher costs for higher wind speed ratings versus reduced operational window for lower wind speed ratings. Arbitrarily, the specification minimums for operating wind velocity are set to a level which generates about 20 % of the Unity Checks (UCs) from unexpected (setback) wind load case UCs on land rigs, and 20 % of maximum expected wind load case UCs on offshore structures. Because the nameplate also includes the curve of allowable hook load versus wind loads, the user will have the necessary information to develop suitable rig operating procedures and to plan rig operations to mitigate the effects of weather conditions on operations for wind conditions in excess of the operating case design wind velocity.

B.8.2 Operating Loads

Operating loads have been defined to include both drilling loads such as hook, rotary and setback loading, and gravity loads to include both dead loads and fluid loads. The specification requirement for the inclusion of dry and wet weights and their first moments about the base of the drilling structure was included to allow users to monitor any growth of weights during the life of the structure due to additions of structure and appurtenances, and to establish a threshold for added weights beyond which requalification of the structure would be required.

B.8.3 Wind Loads

This edition differs from previous API 4 specifications in that it no longer specifies the minimum design wind ratings solely based upon the type of structure (e.g. mast vs. derrick). Instead, the specification requires the use of regional wind data from recognized national and international specifications to determine the design wind ratings, which are independent of the type of structure.

The wind force determination for design in this specification is based, in part, on a 2001 Joint Industry Project (JIP) titled "Measurements of Wind Load Resistance on Drilling Structures." The methodology proposed in the JIP was calibrated against a square derrick structure, and has been modified within this specification for use with other types of drilling structures with caution, particularly with respect to shielding of masts that have an open face.

The specification for wind is intended for the design of drilling structures and developed for this purpose. The underlying technology is valid for prediction of wind forces on drilling structures. The wind velocity used in this specification is a 3-second gust. However, the averaging time for wind velocity as cited in other specifications may differ. Caution should therefore be exercised in making sure the appropriate averaging time is used as cited by a particular design specification.

B.8.3.1 Design Wind

Structural Safety Level—The SSL for masts and derricks is to be selected with due concern of the consequence of failure. Onshore masts with guylines are usually less consequential than are unguyed masts. Derricks are

usually the most consequential. Offshore consequences of failure are often dominated by the support structure of the drill rig system.

Wind Environment—The operational wind is not related to a return period, but to the expected conditions during which normal operations would continue, and is specified by the purchaser.

The expected wind environment is sometimes known as the survival wind, and the unexpected wind as the storm wind.

Purchaser-specified wind environments are defined for erection and transportation.

B.8.3.1.1 Onshore Wind

For the onshore wind, the ASCE/SEI 7-05 Standard, *Minimum Design Load for Buildings and Other Structures*, 7-05, has been considered in the selection of the wind velocities. The ASCE 7-05 Basic Wind Speed Map provides 3-second gust speeds at a 10 m reference elevation associated with an annual probability of 0.02, or a 50-year return period for the U.S. The SSL multipliers of Table 8.1 are used to determine the maximum design wind speed rating from the reference wind speed; for an E1, E2 or E3 structure, the specified SSL multipliers correspond approximately to 100-year, 50-year and 25-year return periods respectively.

The design wind criteria for masts and derricks operating outside the United States should appropriately consider and implement the local equivalent of ASCE/SEI 7-05, if available, or other recognized source.

B.8.3.1.2 Offshore Wind

For the offshore wind, ISO 19901 is used to provide reference wind speed data, or the API Bull 2INT-MET document for the Gulf of Mexico. The SSL multipliers of Table 8.2 are used to determine the maximum design wind speed rating from the reference wind speed; for an E1, E2 or E3 structure, the associated return periods correspond approximately to 200 year, 100 year and 50 year return periods respectively.

B.8.3.1.3 Local Wind Velocity

The elevation factors for the onshore masts and derricks are consistent with the pressure coefficient, K_z , recommended in ASCE/SEI 7-05 for exposure Category C: "Exposure C. Open terrain with scattered obstructions having heights generally less than 30 ft."

The elevation factors for offshore masts and derricks are consistent with the values proposed for offshore platforms in API RP 2A-WSD, *Recommended Practice for Planning, Designing and Constructing Fixed Offshore Platforms—Working Stress Design*, 21st Edition, December, 2000.

B.8.3.2 Wind Loading

Appurtenances contribute significantly to total wind loads on drilling structures. This fact is well documented in the JIP wind tunnel test results, and a number of international wind codes (including ASCE 7, Australian and British codes) require that wind loads from appurtenances be included in force calculations; however, the codes generally do not provide rigorous methods for estimating the wind on such items.

The specification requirement for the inclusion of wind areas and their first moments about the base of the drilling structure was included to allow users to monitor any growth of sail areas during the life of the structure due to additions of structure and appurtenances, and to establish a threshold for added sail area beyond which requalification of the structure would be required.


B.8.3.3 Member-by-Member Method

The process of estimating total wind force by summing the wind forces acting on individual members and adjoining components of a drilling *mast* or *derrick* is similar to the methods of other published wind standards for


estimating total wind force on an open frame truss. When determining the critical wind direction, as a general rule the total wind force for a *diagonal* wind is greater than a broad face wind due to the greater projected area of a diagonal face when compared to a broad face. This rule is recognized in other wind specifications as ASCE/SEI 7-05 and the Australian Specification AS 1170.2.

Determining the direction of the resultant wind force on a member subject to an inclined wind ($\phi < 90^\circ$) is generally done in one of three ways. For the purpose of discussion, let F_I equal the in-line wind force, F_C equal the cross-wind force (normal to F_I), F_N equal the wind force normal to the longitudinal axis of a member, and F_T equal the tangential force parallel to the longitudinal axis (normal to F_N). Using Bernoulli's equation with a shape coefficient equal to one and a member area equal to A (width times length), the wind force acting on the member will vary as a function of wind velocity V and angle of inclination ϕ .


As illustrated below, one approach is to calculate the in-line wind force by projecting the area of the member onto a plane normal to the wind. For this "Projected Area Approach" F_I will be a function of $V^2 A \sin \phi$ while $F_C = 0$. Similarly, $F_N = f(V^2 A \sin^2 \phi)$ and $F_T = f(V^2 A \sin \phi \cos \phi)$.

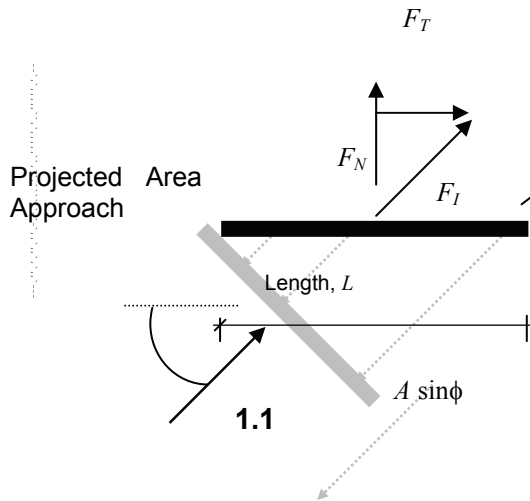

A second approach is to calculate the wind force normal to the member, F_N , using the normal component of wind pressure, $\frac{1}{2} \rho V^2$, projected along the length of the member. For this "Projected Pressure Approach" F_N will be a function of $V^2 A \sin \phi$ while $F_T \cong 0$. Hence, $F_I = f(V^2 A \sin^2 \phi)$ and $F_C = f(V^2 A \sin \phi \cos \phi)$.

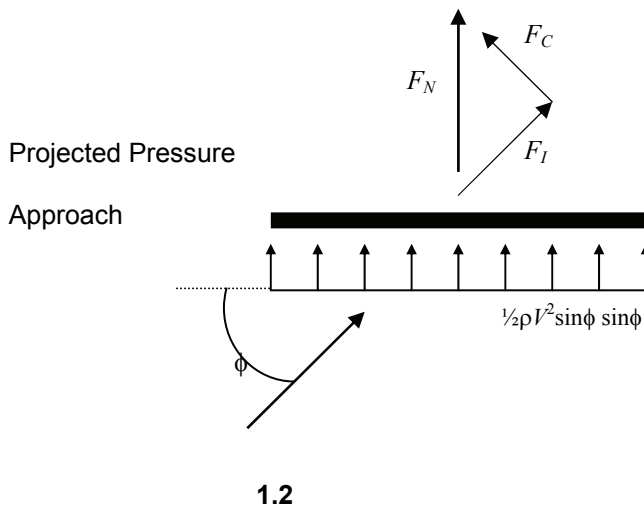

A third approach is to calculate the wind force normal to the longitudinal axis of the member, F_N , by using the normal component of wind velocity, $V \sin \phi$. For this “Velocity Component Approach” F_N will be a function of $V^2 A \sin^2 \phi$ (note that $\sin^2 \phi$ results from squaring $V \sin \phi$ via Bernoulli’s equation) while $F_T \equiv 0$. Hence, $F_I = f(V^2 A \sin^3 \phi)$ and $F_C = f(V^2 A \sin^2 \phi \cos \phi)$.

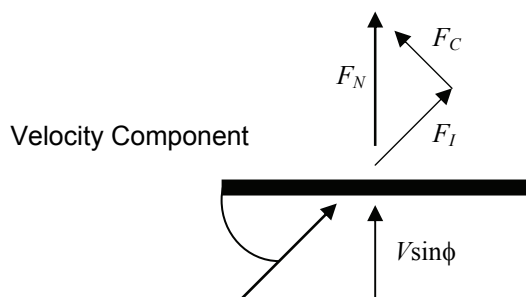

1.3

The table below summarizes the variable terms for each of the three approaches ($V^2 A$ is omitted).

	Wind Force Components			
	With respect to member		With respect to wind direction	
	F_N (normal)	F_T (tangential)	F_I (in-line)	F_C (cross-wind)
Projected Area	$\sin^2 \phi$	$\sin \phi \cos \phi$	$\sin \phi$	0
Projected Pressure	$\sin \phi$	0	$\sin^2 \phi$	$\sin \phi \cos \phi$
Velocity Component	$\sin^2 \phi$	0	$\sin^3 \phi$	$\sin^2 \phi \cos \phi$

Measurements of wind and current forces on structural and tubular members at an incline to the flow indicate that, to a first approximation, normal forces are dominant while tangential forces are negligible. The “Projected Area Approach” implies that the in-line wind force is dominant with a notable tangential force present. By contrast, the “Projected Pressure Approach” and the “Velocity Component Approach” imply that the normal force dominates while the tangential force is negligible. Moreover, these two approaches also use shape coefficients in a manner that is consistent with their derivation. However, the “Projected Pressure Approach” uses components of pressure, which is inconsistent with the definition of pressure as a scalar quantity. By contrast, the “Velocity Component Approach” uses a velocity vector component to calculate fluid (i.e. wind) forces. This approach is consistent with information presented in fluid mechanics references.

The “Velocity Component Approach” is used when estimating the wind force per 8.3.3 for the bare structure and for windwalls. Hence, it is assumed that the tangential component of the wind acting parallel to the longitudinal axis of a member or windwall contributes nominally to the total wind force. Only the normal wind component acting perpendicular to the longitudinal axis ($V \sin \phi$) is considered when estimating the total wind force on a member of the bare structure per 8.3.3. For windwalls, the shape factors of Table 8.6 approximately include the $\sin^2 \phi$ term, so that $K_f = 1.0$.

The “Projected Area Approach” is used for appurtenances other than windwalls. By definition, the “Projected Area Approach” means that both the member width *and length* are projected onto a plane normal to the wind. This calculation differs from the calculation made for the projected area A of a member of the bare structure.

When using the normal velocity component (i.e. the “Velocity Component Approach”) to estimate wind force, a factor $\sin^2\phi$ is applied ($\sin\phi$ is squared since V_z is squared) to account for the wind angle of inclination with respect to the longitudinal axis. The resulting wind force will act along the length of the member or component, normal to the longitudinal axis. Using this approach means that the *in-line* wind component, calculated from the resultant normal force, will vary as a function of $\sin^3\phi$. This variation is consistent with the approach taken for estimating current forces on fixed offshore platforms per API RP 2A-WSD.

The designer should verify that the wind loading methodology of any structural software program used in design is based on this specification.

An initial estimate of the total wind force on a drilling *mast* or *derrick* can be made using the solidity ratio, ρ , of a structural frame. This approach, however, should only be used for *preliminary* analysis. It should not be used in lieu of the specified procedure during final design or analysis. Solidity ratio, ρ , is defined here as the projected area of the front frame face (A_{face}) of the bare structure divided by the gross area enclosed by the frame borders (A_{gross}) of the bare structure. Several references provide shape coefficients for trusses, plate girders, cranes, and derricks as a function of solidity ratio and wind direction. For drilling *masts* and *derricks* with solidity ratios ranging from 0.1 to 0.3, a reasonable estimate of the total wind force may be calculated using the equations below.

For square frames assembled with structural members (e.g. angles, channels, tees) subject to a normal wind:

$$F_{\text{norm},1} = 0.00338 \times V_z^2 \times G_f \times C_f \times A_{\text{face}}$$

$$\text{where } C_f = (4.0\rho^2 - 5.9\rho + 4.0)$$

For square frames assembled with structural members (e.g. angles, channels, tees) subject to a diagonal wind:

$$F_{\text{diag},1} = F_{\text{norm},1} \times (1.0 + 0.75\rho)$$

$$\text{with } F_{\text{diag},1} \text{ no greater than } 1.2 \times F_{\text{norm},1}$$

For square frames assembled with round tubular members subject to a normal wind:

$$F_{\text{norm},2} = F_{\text{norm},1} \times (0.51\rho^2 + 5.7)$$

$$\text{with } F_{\text{norm},2} \text{ no greater than } F_{\text{norm},1}$$

For square frames assembled with round tubular members subject to a diagonal wind:

$$F_{\text{diag},2} = F_{\text{norm},2} \times (1.0 + 0.75\rho)$$

$$\text{with } F_{\text{diag},2} \text{ no greater than } 1.2 \times F_{\text{norm},2}$$

The equations apply only to open frames. Separate calculations must be made to estimate wind forces on wind walls, setback, and other attachments and equipment per 7.2.1.

B.8.3.3.1 Shielding and Aspect Ratio Correction Factor

Shielding of members or components of a mast or a derrick by other members or components will depend on member arrangements and shapes, the solidity of the structure and on the orientation of the mast or of the derrick to the mean wind direction. For derricks, the specification defines a variable shielding factor between 0.5 and 1.0 for the bare structure based on the solidity of the face area. This formula was modified from the shielding equation

for square trussed towers in ASCE 7-05 to allow its use with the specification method which considers all members on all faces of the derrick (rather than just the faces of the derrick normal to the wind as in ASCE 7-05). A uniform shielding factor of 0.85 is defined for appurtenances. These factors are conservatively tuned to the JIP test results.

Because there is no test data or documented code approach for a mast structure, the shielding coefficient for both the bare structure and appurtenances of a mast is limited to 0.9.

For crown cluster, traveling block, hoses, collars, setback, or wind walls, changes in air flow around these shapes are accounted for in the shape coefficients selected for these sections as shown in Table 8.6. The shape coefficients for setback pipes and rods in Table 8.6 also include an aspect ratio correction.

The application of a global shielding factor means that the load reductions resulting from shielding are averaged over all members within a frame. (Though a small part of the overall correction, the same is true when accounting for airflow around member ends.) In reality, only the leeward members will be shielded while the windward members will be exposed entirely to the wind. In most cases, the difference between the actual load and the average load on a windward and leeward (i.e. shielded) member will be about $\pm 10\%$ to 15% . Though loads other than wind will likely control the design, individual members are required to meet the allowable stress requirements for the unshielded member wind load superimposed on the global truss loading with shielding considered.

For dual setback, shielding effects are accounted for when the wind direction is within 20° of the vertical plane common to both setbacks (see Table 8.6).

B.8.3.3.2 Member or Appurtenance Angle of Inclination

When estimating wind forces using the equation in 8.3.3, the longitudinal axes of the vertical, horizontal, and diagonal members will be oriented in such a manner that $\phi = 90^\circ$ for a drilling mast or derrick exposed to a broadside (i.e. a normal) wind, and applies only to the broadside members. By contrast, for a drilling mast or derrick exposed to a diagonal wind, only the longitudinal axes of the vertical members will be orientated so $\phi = 90^\circ$, while $\phi < 90^\circ$ for the horizontal and diagonal members.

B.8.3.3.3 Gust Effect Factor

Wind gusts have spatial scales relative to their endurance. A 3-second gust is coherent over shorter distances and therefore affects smaller elements of a drilling mast or derrick structure. Given the overall size of drilling structures, a gust effect factor is therefore applied to account for spatial variance of wind speeds over larger areas. The basis for the values as shown in Table 8.5 are from the Australian Standard AS 1170.2-1989 and are consistent with the application of gust effect factors is presented in current and past editions of the ASCE/SEI 7-05 Standard.

B.8.3.4 Member or Appurtenance Shape Coefficient

The shape coefficients (also referred to as drag or force coefficients) in Table 8.6 were derived from several sources that listed coefficients as a function of member shape and of wind angle. These sources include the Australian Standard AS 1170.2-1989, *Lattice Towers and Masts* (British Standards Institute); ASCE/SEI 7-05; *Minimum Design Loads for Buildings and Other Structures, Wind Effects on Structures* (Simiu and Scanlan); and *Force Coefficients for Transmission Towers* (Mehta and Lou). To simplify coefficient selection for members and adjoining components common to drilling masts and derricks, representative values were derived from these sources for various section types and shapes. Sensitivities to wind orientation (q) were assessed in an effort to provide a representative value for all wind orientations in the plane of a member cross-section.

A representative shape coefficient of 1.8 for structural sections like angles, channels, beams, and tees was considered a reasonable value when used in combination with the member projected area. Nominal deviations from this 1.8 value result when comparing coefficients of individual members like angles or I-beams, though

greater deviations result with rectangular profiles like channels and tubing. The 1.8 value for structural members is the same value selected by the ASCE Task Committee on Wind Induced Forces (independent of API Spec 4F) for the structural members of a petrochemical facility.

As a result of viscous flow effects, coefficients are greater for flat edge members, but less for rounded members. Moreover, tubular sections have smaller shape coefficients when compared to structural shapes with a similar geometry due to Reynolds number effects.

For attachments like crown cluster, travelling block, hoses, and collars, the shape coefficients represent values similar to values for structural (i.e. flat edge) sections or for tubular (i.e. continuous surfaces) sections, with an adjustment made using an aspect ratio correction of 0.6.

For set-back pipes and rods, the cross sections are similar in shape to square or rectangular tubular sections with a representative shape coefficient of 1.5. Hence, a value of 1.2 was selected for set-back, reflecting an adjustment for aspect ratio. For dual set-back, shielding effects become evident as the wind direction becomes aligned with the two set-backs. Hence, two shape coefficients are provided, one value (1.2) for the windward set-back and another value (0.3) for the leeward set-back, for wind directions within 20° of the vertical plane common to both set-backs. For a semi-circular set-back, a shape coefficient value of 1.2 is selected since the corners are rounded instead of flat.

The derivation of representative shape coefficients for wind walls was based on information provided by various standards for estimating wind loads on solid signs or walls. The resulting wind force may act toward or away from the wall surface, depending on the wind direction and wall configuration. Estimating wind forces on a completely clad drilling mast or derrick involves a more complex process than provided in this specification. Hence, other standards like ASCE Standard 7-95 should be used to estimate wind loadings for such cases.

B.8.3.3.5 Member or Appurtenance Projected Area

Calculations of shape coefficients are made based on the characteristic area of a member, which can either be represented as a constant (e.g. the surface area of the long leg of an unequal-leg angle) or as a variable, often equal to the projected area of a member normal to the given wind direction. Generally considered more intuitive to the designer, the projected area is used to calculate static wind forces on members and adjoining components.

During wind tunnel testing flow usually occurs normal to the longitudinal axis, i.e. in the plane of the member cross-section, with no air flow around the member ends. Hence, most shape coefficients, and the associated characteristic areas, are applicable only to these test conditions. Thus, calculation of the projected area for a member or adjoining component is with respect to a plane normal to the wind component acting perpendicular to the longitudinal axis. The projected area will equal the member length times its width normal to the wind.

For wind walls, the projected area for a given wall section equals its surface area (width times height).

B.8.3.5 Wind Dynamics

Standards are available for estimating wind forces on structures when additional loads are anticipated as a result of dynamic interaction between the wind and the structure. The basis for such an analysis depends on the referenced standard. For example, the Australian Standard AS 1170.2-1989 requires a dynamic analysis for the design of main structural components of any structure if (1) the height or length-to-breadth ratio is greater than five, and (2) the first-mode frequency of vibration is less than 1 Hz. Likewise, ASCE/SEI Standard 7-05 does not apply for dynamic torsional loading or flexible structures with natural frequencies below 1 Hz, or tall slender buildings with height-to-width ratio that exceeds 4.

B.8.4.1 Inertial Loads

The specification broadens inertial force calculations to include surge and sway forces; the previous edition listed only equations for determining inertial forces on the structure for sinusoidally-varying rotational motions such as roll and pitch and heave.

B.8.4.2 Dynamic Amplification

A general requirement in the specification to ensure that the designer gives due consideration concerning dynamic amplification is included, in response to an incident where a drilling structure incurred dangerous oscillations while on a “fixed” platform; in reality, the platform was installed in more than 1000 ft of water and exhibited significant motions in operating sea states with wave periods around five seconds.

B.8.5 Earthquake Loads

As the specification does not address design methodology for earthquake, it is up to the user to specify how the SSL level is to be used for the analysis, if at all.

The document titled *Seismic Assessment Procedures for Drilling Structures on Offshore Platforms*—IADC/SPE 74454, by J. W. Turner, M. Effenberger and J. Irick provides guidance for assessment and design of drilling structures on offshore platforms and Jackups. Much of the information presented therein is also applicable to the consideration of seismic design for onshore structures.

B.8.8 Overturning and Sliding

The specification defines allowable maximum values for coefficients of friction for use in overturning and sliding calculations, unless higher values are validated by testing and operational procedures are consistent with such values.

Stabilizing dead weights are limited to 90 % of their expected value, and the added stability against sliding and overturning resulting from fluid loads or temporarily installed equipment is not allowed unless documented in rig instructions by the manufacturer, and also on the structure nameplate when required for erection.

The specification defines overturning and sliding factors-of-safety for freestanding structures, and requires the calculation of the factor-of-safety in light of the allowable support loadings of the underlying foundation to prevent foundation collapse.

A graph of design loads for tie-down clamps versus increasing overturning and sliding loads may exhibit highly non-linear or bi-linear loading; the clamp sees no load until a load level is reached there the stabilizing effect of gravity loads is overcome. Tie-down clamp loads are calculated using a 1.25 load factor applied to overturning vertical live loads and sliding loads, and with “lightship” dead weights; allowable stresses may not be increased for tie-down clamps. This requirement ensures a measure of robustness in the event of overload caused by a storm event greater than the design event.

Dual load path components, other than tie-down clamps, must meet not only the requirements of 8.1 (with an allowable stress multiplier of 1.33 for extreme events) , but also the requirements of cases calculated using a 1.25 load factor applied to overturning vertical live loads and sliding loads, and with “lightship” dead weights, with an allowable stress multiplier of 1.67. If the nominal factor of safety in AISC is taken as 1.67 (that of a bar in tension or a beam in bending), the nominal minimum factor-of-safety for the unfactored cases will be this value reduced by the allowable stress multiplier, or $1.67/1.33 = 1.25$. Similarly, the additional requirement would provide a nominal minimum factor-of-safety for the factored load cases of $1.67/1.67 \times 1.25 = 1.25$. Thus the additional requirement ensures a consistent factor of safety even if these elements exhibit sharply non-linear or bilinear loading with the level of overturning and sliding loads.

Annex C

(informative)

API Monogram

C.1 Introduction

The API Monogram Program allows an API Licensee to apply the API Monogram to products. Products stamped with the API Monogram provide observable evidence and a representation by the Licensee that, on the date indicated, they were produced in accordance with a verified quality management system and in accordance with an API product specification. The API Monogram Program delivers significant value to the international oil and gas industry by linking the verification of an organization's quality management system with the demonstrated ability to meet specific product specification requirements.

When used in conjunction with the requirements of the API License Agreement, API Specification Q1, including Annex A, defines the requirements for those organizations who wish to voluntarily obtain an API License to provide API monogrammed products in accordance with an API product specification.

API Monogram Program Licenses are issued only after an on-site audit has verified that the Licensee conforms to both the requirements described in API Specification Q1 in total, and the requirements of an API product specification.

For information on becoming an API Monogram Licensee, please contact API, Quality Programs, 1220 L Street, N. W., Washington, D.C. 20005 or call 202-682-8000 or by email at quality@api.org.

C.2 API Monogram Marking Requirements

These marking requirements apply only to those API Licensees wishing to mark their products with the API Monogram.

Application of the API Monogram shall be per the manufacturers API Monogram Marking Procedure as required by API Specification Q1.

Bibliography

- [1] API Specification 8C, *Specification for Drilling and Production Hoisting Equipment (PSL 1 and PSL 2)*
- [2] API Specification 9A, *Specification for Wire Rope*
- [3] ABS¹⁰ *Rules for Building and Classing Offshore Drilling Units*, 1991
- [4] ASNT¹¹ TC-1A, *Recommended Practice for Personnel Qualification and Certification in Non-Destructive Testing* (also known as ASNT 2055)

¹⁰ American Bureau of Shipping, ABS Plaza, 16855 Northchase Drive, Houston, Texas 77060, www.eagle.org.

¹¹ American Society for Nondestructive Testing, PO Box 28518, 1711 Arlingate Lane, Columbus, Ohio 43228-0518, www.asnt.org.

Copyright American Petroleum Institute
Provided by IHS under license with API
No reproduction or networking permitted without license from IHS



1220 L Street, NW
Washington, DC 20005-4070
USA

202.682.8000

Additional copies are available through IHS

Phone Orders: 1-800-854-7179 (Toll-free in the U.S. and Canada)
303-397-7956 (Local and International)

Fax Orders: 303-397-2740

Online Orders: global.ihs.com

Information about API Publications, Programs and Services
is available on the web at www.api.org

Product No: G04F03